



The Influence of Water and DEE as Additives with Diesel Fuel in a Light Duty Diesel Engine Generator-An Experimental Investigation

J. Sathik Basha^{1*}, Montaha Al Balushi²

¹Department of Process Engineering, International Maritime College Oman, Sohar, Oman

²Central Operations Trainee, Oman Oil Company Exploration & Production LLC, Muscat

Email: mailsadhik@gmail.com, montahaalbaloochi96@gmail.com

Abstract: Currently, our global environment has been affected due to the air pollution caused by many sectors (such as automotive, industrial, transportation) in higher magnitudes. Many environmentalists, scientists, researchers and engineers have contributed their efforts to eradicate the air pollution. It is well known noted that most of the harmful pollutants were evolved from diesel engine power engines/plants. Considering the objective of enhancing performance and reducing harmful emissions of diesel engine, the current research work has been conducted on mixing DEE (Di-Ethyl Ether) and normal water with normal diesel fuel in definite quantities. Five stages of investigations were carried out to perform the task of blending water and DEE with the normal diesel fuel. In the first stage, to obtain the baseline readings, normal diesel fuel was experimented in a light duty constant speed diesel engine. Normal water (2% & 4% by vol.) was combined with the normal diesel fuel with the aid of emulsifiers (Span80 & Tween80) and mechanical stirrer (speed of 3000 rpm) to obtain the water blended diesel emulsion fuels in the second stage. In the third stage, DEE was mixed with water-emulsion fuels which were prepared in the second stage. The stability and properties of fuels was determined in the fourth stage. In the fifth stage, the prepared stable DEE-water-diesel emulsion fuels were tested in a light duty constant speed diesel engine generator and eventually compared to those readings of normal diesel fuel. Experimental outcome from all the tested fuels revealed that water and DEE mixed emulsion fuels reflected better performance and reduced harmful emission attributes.

Keywords: surfactants, water+DEE, emissions, light duty diesel engine

1. Introduction

Numerous efforts have been devised by automobile researchers to safeguard the environment against many pollutants (such as Oxides of Nitrogen and Carbon, Hydrocarbons etc.) emitted by diesel engines. To exterminate those harmful pollutants (which are precursor for the global defects like ozone layer depletion, global warming, and acid rain^[1-5]), numerous researchers have concocted many methods to minimise it in accordance with the stringent emission legislation (Euro VI norms). The automobile researchers, scientists and environmental engineers have contributed their efforts to enhance the mileage and to reduce emissions of diesel engines in a systematic way. Among many methods, most of the automotive professionals^[1-19] in the technical community preferred fuel modification technique to attain better mileage and reduced emissions trend from the diesel engine. This is due to the fact that fuel modification method involves feasible way to blend any additive (such as organic additive, inorganic additive, nanoparticle additive, water etc.) with base fuel (such as diesel and biodiesel). In the latest fuel modification technology, efforts are underway to incorporate multi-fuel additives with the diesel fuel to investigate the working features of diesel engine in terms of performance and emission characteristics. Hence, in the current investigation, an oxygenated additive cum cetane improver (DEE-Di-Ethyl Ether) and water are selected as potential additives with the diesel fuel, and eventually mixed with specific proportions using a mechanical homogenizer systematically. Henceforth, in this research assessment, the experimental methodology with a focus on uncertainty analysis, and the results and discussions on using the DEE blended water-diesel emulsion fuel in a light-duty diesel engine generator is investigated.

2. Experimental methodology and uncertainty analysis

The current research attempt has been carried out systematically in due respect with the international standards of

testing and evaluation of a diesel engine operation. To carry out, the proposed investigation, a light-duty diesel engine generator coupled with an electrical loading was utilized to appraise the performance entities (such as brake thermal efficiency and brake specific fuel consumption) and emission entities (level of NO_x, CO, CO₂, HC) from zero load to full load. The fuel consumption rate of each tested fuel during the experiment was quantified using a glass burette and stopwatch combination, and eventually the brake thermal efficiency values were measured and compared for all the tested fuels. Further, the emissions from the diesel engine generator were measured on using an calibrated KANE gas analyzer. As per the SAE international standard of testing and evaluation of diesel engine, starting and stopping operation of the light duty constant speed diesel engine generator was carried out on using the normal diesel fuel. In this research attempt, totally five stages of investigation have been materialized. In the first stage, performance attribute (both brake thermal efficiency & brake specific fuel consumption) and harmful emission readings (HC, NO_x, CO, CO₂) of normal diesel fuel in a light duty constant speed diesel engine generator was noted and eventually recorded. Normal water (2% & 4% by vol.) was combined with the normal diesel fuel with the aid of emulsifiers (Span80 & Tween80) and mechanical stirrer (speed of 3000 rpm) to obtain the water blended diesel emulsion fuels in the second stage. In the third stage, DEE was mixed with water-emulsion fuels which were prepared in the second stage. In the fourth stage, stability and properties of fuels (such as calorific value, density, kinematic viscosity, flash point and fire point) were determined as per the ASTM standards (refer Figure 1 & Table 1).

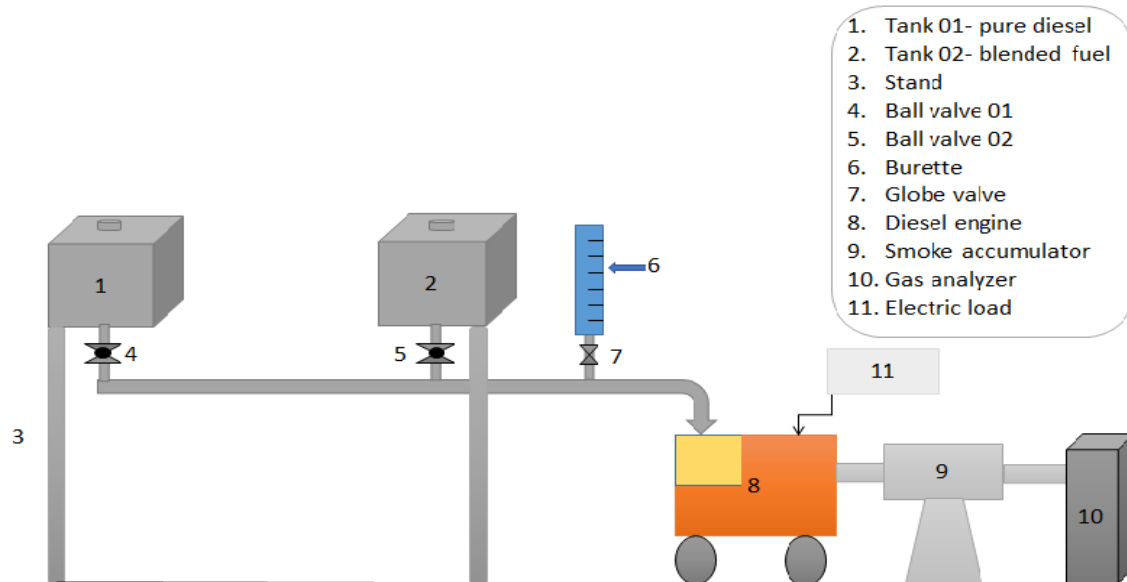


Figure 1. Experimental setup^[23]

In the final stage, experimental evaluation in a light duty constant speed diesel engine generator were carried out on using the stable water-diesel emulsions and DEE blended water-diesel emulsions and eventually compared to those readings of normal diesel fuel.

Table 1. Properties of fuel

Fuel No.	Fuel code	Density (g/cm ³)	Kinematic Viscosity @ 40 °C (cSt)	Flash point (°C)	Cetane No.
1	Diesel	0.830	2.10	50	55
2	98D2WSDEE	0.844	3.85	85	70
3	96D4WSDEE	0.849	3.90	88	72

The diesel engine generator specifications is shown in the Table 2.

Table 2. Specifications of diesel engine generator

Particulars		Values
Rated output (Watt)	-	5000
Type	-	Vertical Single Cylinder,
Forced Air cooled, 4 Stroke	-	418
Displacement (-	418
Fuel Tank Capacity (L)	-	12.5
Starting System	-	Recoil & Key
Noise Level (@7M dB)	-	78
Net Weight (kg)	-	120
Voltage (V)	-	230 V
Current	-	25 A
Phase	-	Single-phase
Frequency (Hz)	-	50 Hz
Engine speed	-	3000 rpm
Lubrication oil	-	SAE40

The following typical curves were assessed for both diesel and additive blended diesel fuels:

1. Performance features (both Brake thermal efficiency & Brake specific fuel consumption) vs Engine Load.
2. Level of harmful emissions (NO_x, CO, CO₂, HC) vs Engine Load.

3. Uncertainty analysis

In the current experimental research work, there are some possibilities of errors raised from various sources (viz., instruments, environmental conditions, calibration, human observation, visibility conditions etc.). In order to calculate the possible error percentage during the experimentation, uncertainty or experimental error analysis are calculated. In the current investigation, instruments such as KANE gas analyzer, overhead digital stirrer, burette and stopwatch were used. Hence, the uncertainty error percentage for the whole experimentation is calculated as per the Moffat^[20] relationship as below:

Uncertainty Error (%)

$$\begin{aligned}
 &= \sqrt{(NO_x)^2 + (CO)^2 + (CO_2)^2 + (HC)^2 + (Burette\ Reading)^2 + (Digital\ Overhead\ Stirrer)^2 + (Stop\ Watch)^2} \\
 &= \sqrt{(1)^2 + (1)^2 + (0.01)^2 + (0.1)^2 + (1)^2 + (1)^2 + (1)^2} \\
 &= 2.238\%
 \end{aligned}$$

4. Results and discussions

The diesel engine generator working features (in terms of performance and emissions level) on using normal diesel fuel and DEE blended water-diesel emulsions are discussed in the succeeding sections.

4.1 Performance features of the diesel engine generator

Figure 2 & 3 illustrates the performance features (such as brake thermal efficiency and specific fuel consumption) of the light duty constant speed diesel engine generator for all the tested fuels.

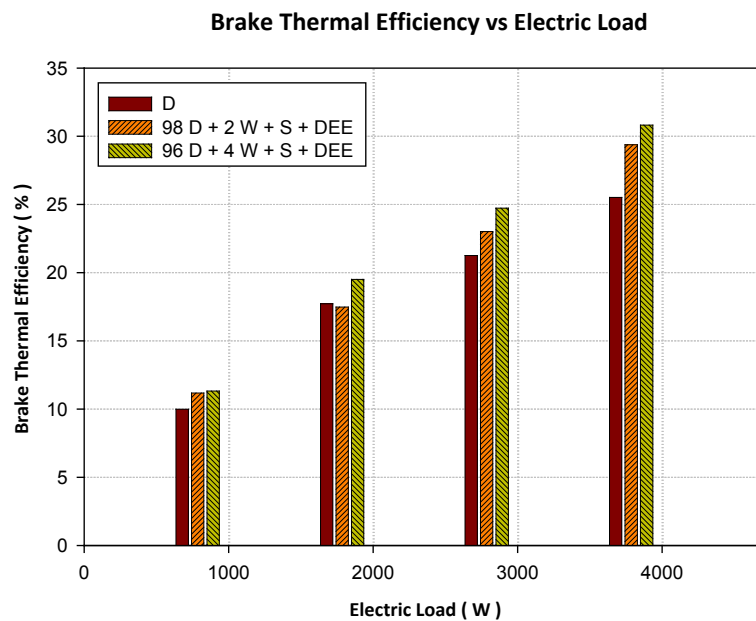


Figure 3. Brake thermal efficiency variation of diesel and water blended diesel fuels

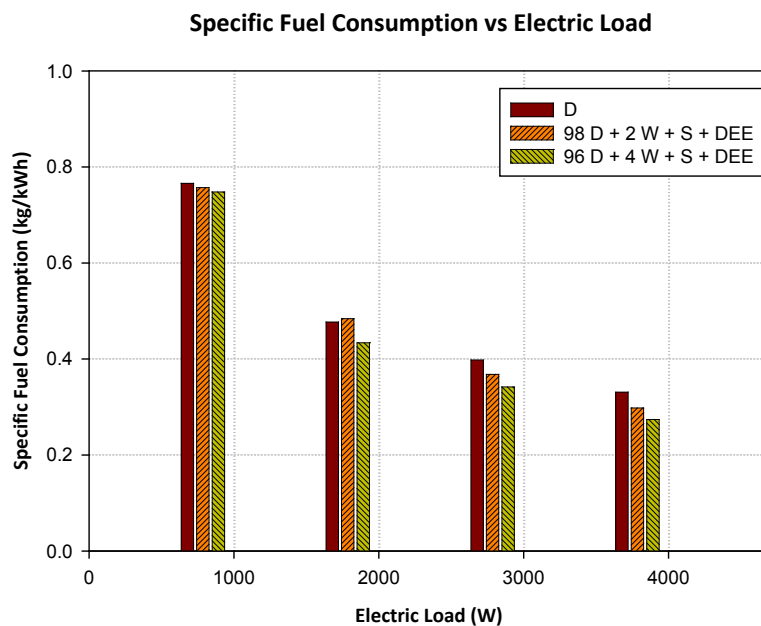


Figure 4. Brake specific fuel consumption variation of diesel and water blended diesel fuels

It is eminent from the figures that the Di-Ethyl Ether blended emulsion fuels reflected minimal fuel consumption compared to that of pure diesel fuel starting from the zero load to full load capacity of the diesel engine generator. The presence of cetane improver (i.e., DEE) in the emulsion fuel could have played a vital role on brake specific fuel consumption attribute. It is well known fact that DEE has higher cetane no. (around 125) and could have influenced better combustion (due to micro-explosion effects^[21]). Owing to this fact, DEE blended emulsion fuels could have influenced lesser fuel consumption to maintain the speed of the diesel engine generator constant, and simultaneously reflected increased in the brake thermal efficiency. This is possibly due to the fact that both performance features (brake specific fuel consumption & brake thermal efficiency) are inversely related to each other. At the full load (4000 W), the fuel consumption for the normal diesel fuel was 0.331 kg/kWh; whereas it was 0.298 kg/kWh and 0.274 kg/kWh for the 98D2WSDEE and 96D4WSDEE fuels. A similar trend of enhanced brake thermal efficiency was noted for the DEE water mixed diesel fuels compared to that of normal diesel fuel. At the full load (4000 W), the brake thermal efficiency for the normal diesel fuel was 25.52%; whereas it was 29.38% and 30.82% for the 98D2WSDEE and 96D4WSDEE fuels respectively.

4.2 Emission features of the diesel engine generator

The succeeding Figures 4, 5, 6 & 7 designates the emission points of diesel fuel and DEE +water mixed diesel fuels. Owing to addition of DEE with the diesel fuel, the fuel quality (such as cetane no., flash point etc.) of DEE mixed fuels were improved compared to that of diesel fuel. This could have led to better combustion attributes in the engine cylinder of the diesel engine generator. Due to these reasons, the amount of the emission levels (CO, CO₂, HC, and NO_x) were considerably reduced for the DEE water-diesel emulsions on comparison with that of normal diesel fuel.

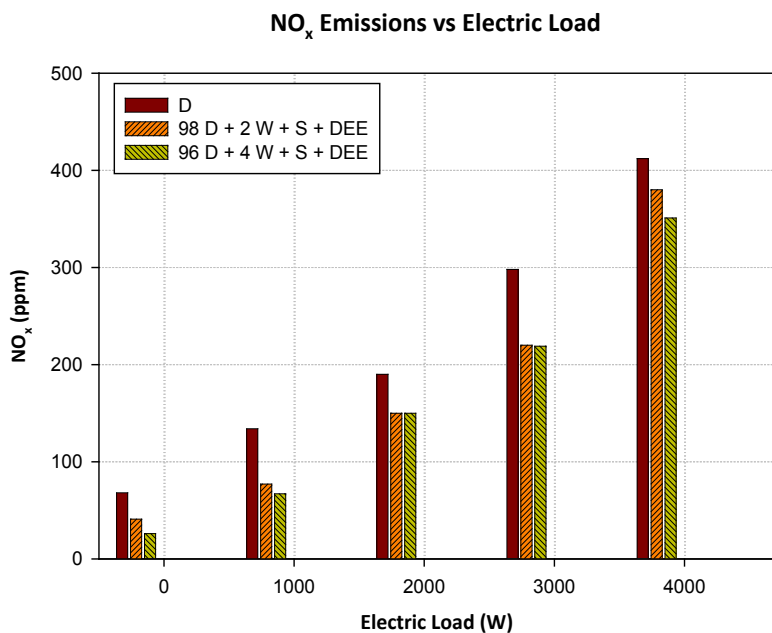


Figure 5. NOx emission variation of diesel and water blended diesel fuels

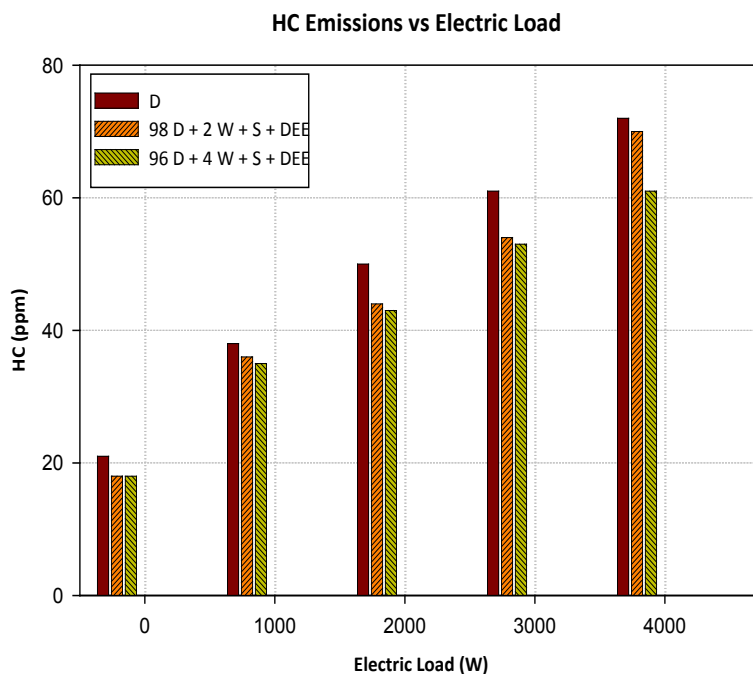


Figure 6. HC emission variation of diesel and water blended diesel fuels

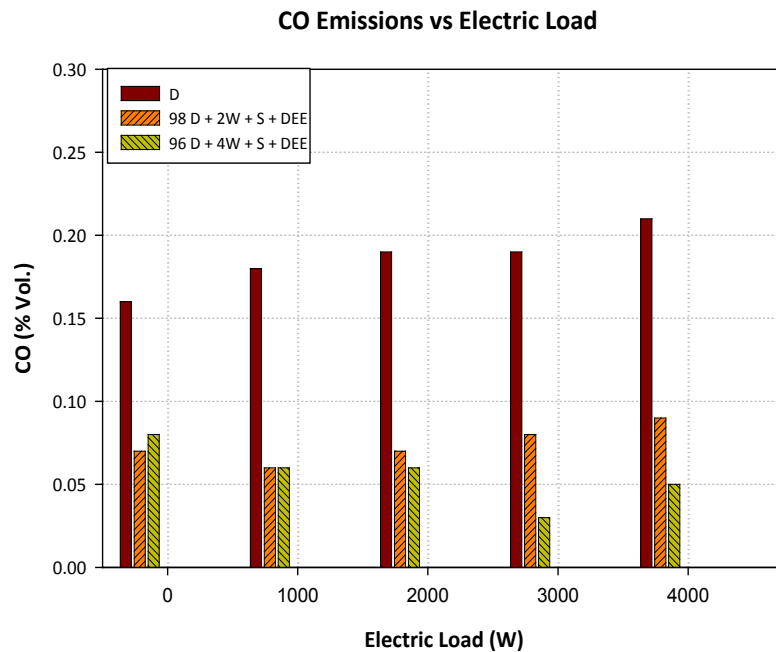


Figure 7. CO emission variation of diesel and water blended diesel fuels

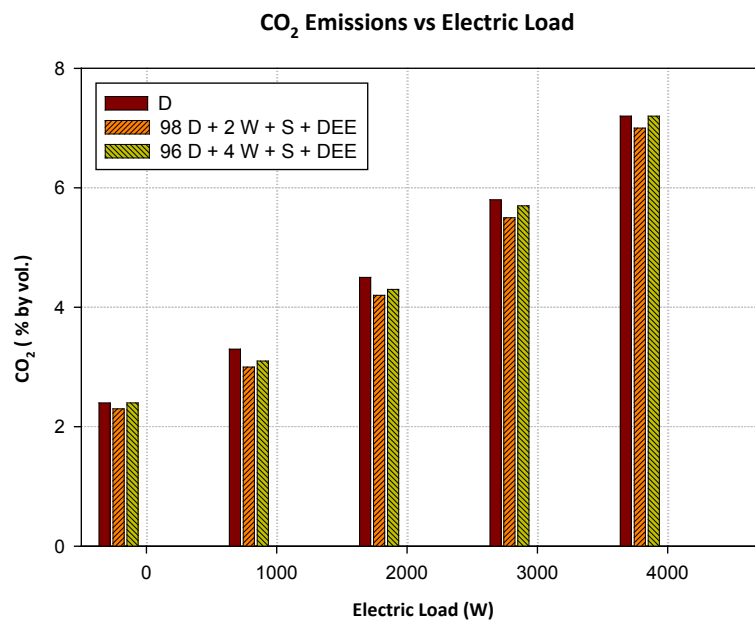


Figure 8. CO₂ emission variation of diesel and water blended diesel fuels

The existence of H₂O in diesel fuel has expressively prejudiced to reduce the harmful emissions for the DEE water mixed diesel fuels due to secondary atomization effects explained by Sadhik and Montaha^[22, 23] and Abu Zaid^[24]. At the full load (4000 W), the CO emissions for the normal diesel fuel was 0.22% (by vol.); whereas it was 0.09% and 0.05% (by vol.) for the 98D2WSDEE and 96D4WSDEE fuels. A similar trend of reduced NO_x emissions was noted for the water mixed diesel fuels compared to that of normal diesel fuel. At the full load (4000 W), the level of NO_x emissions for the normal diesel was 412 ppm; whereas it was 380 ppm and 351 ppm for the 98D2WSDEE and 96D4WSDEE fuels respectively. A similar trend of marginal reduction of HC emissions were noted for the water mixed diesel fuels compared to that of normal diesel fuel^[25-27]. At the full load (4000 W), the level of HC emissions for the neat diesel was 75 ppm; whereas it was 70 ppm and 61 ppm for the 98D2WSDEE and 96D4WSDEE fuels respectively. Further, it has been noticed that overall cost on preparing the emulsion fuels^[28] is less while compared to that of preparing biodiesel blended emulsion fuels. This is due to the fact that the water is cheap and easily available, and the amount of DEE used in the investigation is

very lesser in magnitude.

5. Conclusions

With fortitude to enhance the performance feature and reduce emissions from a diesel engine generator without any major modification, the current study was carried out on blending DEE and water with normal diesel fuel methodically. The following conclusions were drawn:

The stability of the water mixed diesel fuels (98D2WSDEE and 96D4WSDEE) were more than fifteen days under idle conditions.

There was no uncharacteristic noise or starting difficulty during the whole experimentation using DEE and water mixed diesel fuels.

DEE+Water mixed diesel fuels have extensively amended the working facets of the diesel engine generator.

At all the loads, the monoxides of carbon and oxides of nitrogen of the DEE+water mixed diesel fuels were overwhelmingly reduced. At the full load (4000 W), the level of NO_x emissions for the normal diesel was 412 ppm; whereas it was 380 ppm and 351 ppm for the 98D2WSDEE and 96D4WSDEE fuels respectively.

Overall, it is established that 4% of water DEE blended with diesel fuel has the potentiality to boost the working attributes of diesel engine generator.

6. Acknowledgment

The authors carried out the research work with an financial support from The Research Council (TRC) of the Sultanate of Oman under the Block Funding Program (TRC Block Funding Agreement No: FURAP/IMCO/18/008). The authors are also highly indebted to TRC, Dr. Hilal Al Hadhrami (Dean), and Management of International Maritime College Oman (IMCO) for providing us the required facilities to carry out the above research work in a shorter period of time.

Nomenclature

CI	-	Compression Ignition
CO ₂	-	Carbon Dioxides
CO	-	Carbon Monoxides
D	-	Diesel
HC	-	Hydrocarbons
NO _x	-	Nitrogen Oxides
98D2WSDEE	-	98% of Diesel+2% of Water+Surfactant
96D4WSDEE	-	96% of Diesel+4% of Water+Surfactant

Conflict of interest

The authors declare that there is no conflict of interest regarding the publication of this paper.

References

- [1] Abedin, M., Masjuki, H., Kalam, M., et al. Thermal balancing of a multi-cylinder diesel engine operating on diesel, b5 and palm biodiesel blends. *Journal of Clean Energy Technologies*. 2015; 3(2): 115-118.
- [2] Rajkumar. Impact of oxygen enriched air intake on the exhaust of a single cylinder diesel engine. *American Journal of Environmental Sciences*. 2011; 7(2): 136-140.
- [3] Song, J., Zello, V., Boehman, A., et al. comparison of the impact of intake oxygen enrichment and fuel oxygenation on diesel combustion and emissions. *Energy & Fuels*. 2004; 18(5): 1282-1290.
- [4] Basha, J., Anand, R. Basha, J., et al. Performance & emission characteristics of a DICl engine using carbon nanotubes blended diesel. *Int. J. of Applied Engg. & Res.* 2010; 697-708.
- [5] Basha, J., Anand, R. Performance & emission characteristics of a DICl engine using carbon nanotubes blended diesel. *Int. J. of Advances in Thermal Science & Engg.* 2010; 67-76.
- [6] Basha, J., Anand, R. Effects of alumina nanoparticles blended jatrophia biodiesel fuel on working characteristics of a diesel engine. *Int. J. of Ind. Engg. & Tech.* 2011; 53-62.
- [7] Basha, J., Anand, R. Effects of nanoparticle-blended water biodiesel emulsion fuel on working characteristics of a

- diesel engine. *International Journal of Global Warming*. 2010; 2(4): 330.
- [8] Basha, J., Anand, R. An experimental study in a CI engine using nanoadditive blended water-diesel emulsion fuel. *International Journal of Green Energy*. 2011; 8(3): 332-348.
 - [9] Sathik Basha, J., Anand, R. Role of nanoadditive blended biodiesel emulsion fuel on the working characteristics of a diesel engine. *Journal of Renewable and Sustainable Energy*. 2011; 3(2): 023106.
 - [10] Basha, J., Anand, R. An experimental investigation in a diesel engine using carbon nanotubes blended water-diesel emulsion fuel. *Proceedings of the Institution of Mechanical Engineers, Part A: Journal of Power & Energy*. 2011; 225(3): 279-288.
 - [11] Basha, J., Anand, R. Effects of nanoparticle additive in the water-diesel emulsion fuel on the performance, emission and combustion characteristics of a diesel engine. *International Journal of Vehicle Design*. 2012; 59(2-3): 164-181.
 - [12] Sathik Basha, J., Anand, R. The influence of nano additive blended biodiesel fuels on the working characteristics of a diesel engine. *Journal of the Brazilian Society of Mechanical Sciences and Engineering*. 2013; 35(3): 257-264.
 - [13] Sathik Basha, J., Anand, R. An experimental analysis of a diesel engine using alumina nanoparticles blended diesel fuel. *SAE Technical Paper*. 2014; 1: 1391.
 - [14] Sathik Basha, J., Anand, R. Preparation of water-biodiesel emulsion fuels with CNT & Alumina nano-additives and their impact on the diesel engine operation. *SAE Technical Paper*. 2015; 1: 0904.
 - [15] Sathik Basha, J., Anand, R. Performance, emission and combustion characteristics of a diesel engine using Carbon Nanotubes blended Jatropa Methyl Ester Emulsions. *Alexandria Engineering Journal*. 2014; 53(2): 259-273.
 - [16] Sathik Basha, J. Impact of Carbon Nanotubes and Di-Ethyl Ether as additives with biodiesel emulsion fuels in a diesel engine-An experimental investigation. *Journal of the Energy Institute*. 2018; 91(2): 289-303.
 - [17] Sathik Basha, J. *Applications of functionalized carbon based nanomaterials*. Edited V.K. Thakur, Taylor & Francis - CRC Press Publishers; 2014. p.573-587.
 - [18] Sathik Basha, J. *Impact of Nano-additive blended biodiesel fuels in Diesel Engines*. Edited M. Rai, Springer Publications; 2017. p.325-339.
 - [19] Sathik Basha, J. The influence of hexanol and methyl acetate as oxygenated additives with diesel fuel in a diesel engine generator. *Int. Journal of IC Engines and Gas Turbines*. 2019; 5:(1).
 - [20] Moffat, R.J. Describing the uncertainties in experimental results. *Experimental Thermal and Fluid Science*. 1988; 1: 3-17.
 - [21] Sathik Basha, J. Impact of nano-additives on the performance, emission and combustion characteristics of a direct injection compression ignition engine. 2011.
 - [22] Sathik Basha J, Montaha Al Balushi. Performance and emission features of a light duty diesel engine generator powered with water-diesel emulsions. 2019. p.26-28.
 - [23] Sathik Basha J, Montaha Al Balushi. Performance and emission features of a light duty diesel engine generator powered with water-diesel emulsions. *European Journal of Engineering Science and Technology*. 2019; 2(4): 22-27.
 - [24] Abu-Zaid, M. Performance of single cylinder, direct injection diesel engine using water fuel emulsions. *Energy Conversion and Management*. 2004; 45: 697-705.
 - [25] Basha, J. Sathik, R.B. Anand. Recent technologies for enhancing performance and reducing emissions in diesel engines. *IGI Global*. 2020: 1-298. Available from: doi:10.4018/978-1-7998-2539-5.
 - [26] Sezer, İ. A review study on using diethyl ether in diesel engines: Effects on fuel properties, injection, and combustion characteristics. *Energy & Environment*. 2020; 31(2): 179-214. Available from: <https://doi.org/10.1177/0958305X19856751>.
 - [27] Jin-Yuan Syu, Yuan-Yi Chang, Chao-Heng Tseng, et al. Effects of water-emulsified fuel on a diesel engine generator's thermal efficiency and exhaust. *Journal of the Air & Waste Management Association*. 2014; 64(8): 970-978. Available from: doi:10.1080/10962247.2014.905508.
 - [28] Neeraj Kumar, Hifjur Raheman, Rajendra Machavaram. Performance of a diesel engine with water emulsified diesel prepared with optimized process parameters. *International Journal of Green Energy*. 16(9): 687-701. Available from: doi:10.1080/15435075.2019.1618309.