Contemporary Mathematics
https://ojs.wiserpub.com/index.php/CM/

Research Article

Exploring Solutions' Families of the Fractional Hirota-Satsuma Coupled KdV Equation via Extended Direct Algebraic Method

Wael W. Mohammed[1,2], Miguel Vivas-Cortez[3*], Muhammad Bilal[4], Majeed Ahmad Yousif[5], Karim K. Ahmed[6], Pshtiwan Othman Mohammed[7,8,9†]

[1]Department of Mathematics, College of Science, University of Ha'il, Ha'il, Saudi Arabia
[2]Department of Mathematics, Faculty of Science, Mansoura University, Mansoura, Egypt
[3]Faculty of Exact and Natural Sciences, School of Physical Sciences and Mathematics, Pontifical Catholic University of Ecuador, Sede Quito, Ecuador
[4]Department of Mathematics, Abdul Wali Khan University, Mardan 23200, Pakistan
[5]Department of Mathematics, College of Education, University of Zakho, Zakho, Iraq
[6]Department of Mathematics, Faculty of Engineering, German International University (GIU), New Administrative Capital, Cairo, Egypt
[7]Department of Mathematics, College of Education, University of Sulaimani, Sulaymaniyah 46001, Iraq
[8]Department of Computer Engineering, Biruni University, Istanbul 34010, Turkey
[9]Associate Member of Section of Mathematics, International Telematic University Uninettuno, Rome 00186, Italy
E-mail: mjvivas@puce.edu.ec (M.V.C.); pshtiwansangawi@gmail.com (P.O.M.)

Received: 14 September 2025; **Revised:** 31 Ocotber 2025; **Accepted:** 24 November 2025

Abstract: An extended direct algebraic method is used in this work to examine the soliton solutions of the fractional Hirota-Satsuma coupled Korteweg-de Vries equation. Understanding the dynamic behaviour of solitons in nonlinear systems using analytical solutions is our goal. To obtain precise soliton solutions, we utilise a logistic technique. These solutions are then shown graphically in three dimensions, two dimensions, and contours. Soliton interactions' complex dynamics and stability in fractional nonlinear systems are demonstrated by the results. This study clarifies the underlying dynamics and possible uses of soliton behaviour in complex systems, advancing our understanding of this phenomenon.

***Keywords*:** fractional calculus, soliton solutions, nonlinear dynamics, Hirota-Satsuma equation, complex systems

MSC: 35C08, 35Q51, 37K40

1. Introduction

Since many events are inherently complex, line-based systems are frequently theoretical approximations of simpler nonlinear systems. On the other hand, nonlinear systems better represent the objective world. Thus, it is essential for modern science and technology to understand and research nonlinear phenomena. Nonlinear differential equations can be used to solve many nonlinear phenomena from the perspective of mathematical physics [1–4]. Nonlinear Fractional Differential Equations (NLFDEs) have attracted a lot of interest among them. NLFDEs, a type of partial differential equation, permit derivative orders with fractional values as opposed to integer values. These equations are helpful in many fields, including biology, engineering, physics, finance, and many more, particularly so expressing systems with memory

Copyright ©2026 Miguel Vivas-Cortez, et al.
DOI: https://doi.org/10.37256/cm.7320268626
This is an open-access article distributed under a CC BY license
(Creative Commons Attribution 4.0 International License)
https://creativecommons.org/licenses/by/4.0/

effects, nonlocal events, or complex dynamics. It is typical practice in NLFDEs to move fractional derivatives with respect to geographical or temporal factors. Riemann-Liouville [5, 6], Beta [7], Grünwald-Letnikov [8], and Caputo [9] are the definitions of fractional derivatives that are most often employed. NLFDEs are a rapidly developing field of study that provides powerful tools for elucidating the dynamics. We may observe that increasingly more innovative applications and solution strategies for NLFDEs are appearing as computational theories and methods continue to advance.

Several efficient methods for identifying analytical solutions for NLFDEs have been developed in the literature. They include the fractional subequation method [10–12], the F-expansion method [13], the first integral method, and the generalised Riccati equation mapping approach [14–16]. Kudryashov methods [17, 18], $\exp(-\phi(z))$-expansion method [19, 20], (G'/G)-expansion method [21–23], tanh-function method, truncated Painlevé expansion method [24–26], modified simple equation method [27–29], Sine-Gordon expansion method [30], complex method [31–33], and so forth. Two long waves with distinct dispersion relations usually interact according to the Hirota-Satsuma Coupled KdV (HScKdV) equation [34]. The fractional Hirota-Satsuma Coupled KdV (fHScKdV) equation is extended to the fractional form, capturing extra levels of complexity that integer-order derivatives are unable to adequately represent. Here is the fHScKdV equation [35]:

$$\begin{cases} D_t^{\sigma}\varpi = \dfrac{1}{4}\varpi_{xxx} + 3\varpi\varpi_x + 3(-V^2 + W)_x \\ D_t^{\sigma}V = -\dfrac{1}{2}V_{xxx} - 3\varpi V_x \\ D_t^{\sigma}W = -\dfrac{1}{2}W_{xxx} - 3\varpi W_x. \end{cases} \tag{1}$$

Applications of the fHScKdV equation may be found in physics, engineering, and finance, among other domains. It can be used, for instance, to represent fractional-property wave and turbulence phenomena in fluid mechanics. It can be used in materials science to explain how materials with memory effects behave. It may analyse market dynamics and show long-term consequences in the finance industry. Because the fHScKdV equation is an interesting system, researchers are interested in it. Both the (G'/G)-expansion technique and the Riemann-Liouville derivative were used by Alam et al. [35] to obtain the closed-form solutions. Yin et al. [36] used the unified technique, the enhanced F-expansion method, and the homogeneous balancing approach to extract different analytical solutions. To get accurate results, Ganji et al. [37] used the homotopy perturbation technique. By using the extended Jacobian elliptic function expansion method, Yan [38] generated exact doubly periodic solutions. Kaplan and Bekir [39] used local fractional derivatives and the $\exp(-\phi(z))$-expansion method to obtain exact solutions for the fHScKdV problem.

According to our findings, the Extended Direct Algebraic Method is efficient and straightforward. Researchers in related fields might find this helpful as it enhances the analysis of the fHScKdV equation. This study investigates the fHScKdV equation and looks at its bifurcation, sensitivity, and chaotic behaviours using a novel approach called the logistic method.

1.1 *Key characteristics of the modified riemann-liouville derivative*

This study uses the Extended Differential Algebraic Method (EDAM) approach to construct exact analytical solutions for fractional differential equations that are nonlinear and where the expression σ is present.

$$D_z^{\sigma}\varphi(z) = \begin{cases} \dfrac{1}{\Gamma(-\sigma)}\displaystyle\int_0^z (z-\psi)^{-\sigma-1}[\varphi(\psi)-\varphi(0)],\ \sigma<0 \\ \dfrac{1}{\Gamma(1-\sigma)}\dfrac{d}{dz}\displaystyle\int_0^z (z-\psi)^{-\sigma}[\varphi(\psi)-\varphi(0)]dz,\ 0<\sigma<1 \\ [\varphi^{(\sigma-\nu)}(z)]^{(\nu)},\ \nu\le\sigma<\nu+1,\ \nu>1. \end{cases}$$

where the Gamma function is defined by, $\Gamma(\sigma)$:

$$\Gamma(\sigma) = \lim_{\nu\to\infty}\frac{\nu!\nu^{\sigma}}{(\sigma+1)(\sigma+2)(\sigma+3)...(\sigma+\nu)}.$$

Some results are derived:

$$D_z^{\sigma}z^{\kappa} = \frac{\Gamma(\kappa+1)}{(\kappa-\sigma+1)}z^{\kappa-\sigma},\ \kappa>0$$

$$D_z^{\sigma}[\varphi(z)\omega(z)] = \omega(z)D_z^{\sigma}\varphi(z) + \varphi(z)D_z^{\sigma}\omega(z)$$

$$D_z^{\sigma}\varphi^{[\omega(z)]} = \varphi'\omega[\omega(z)]D_z^{\sigma}\omega(z) = D\omega^{\sigma}\varphi[\omega(z)](\omega_z')^{\sigma}.$$

Mittag-Leffler Function

The representation of the two-parameter Mittag-Leffler function is as follows:

$$E_{\sigma,\,\tau}(z) = \sum_{k=0}^{\infty}\frac{z^k}{\Gamma(\sigma k+\tau)},\quad \mathrm{Re}(\sigma)>0,\quad \mathrm{Re}(\tau)>0.$$

Notable Characteristics of Fractional Derivatives

The following properties hold:

1.

$$D^{\sigma}z^{\lambda} = \frac{\Gamma(\lambda+1)}{\Gamma(\lambda-\sigma+1)}z^{\lambda-\sigma},\quad \lambda>0.$$

2.

$$D^{\sigma}(c\Phi(z)) = cD^{\sigma}\Phi(z).$$

3.

$$D^{\sigma}(a\Phi(z)+b\Psi(z))=aD^{\sigma}\Phi(z)+bD^{\sigma}\Psi(z).$$

2. EDAM operational procedure

To examine the Fractional Partial Differential Equation (FPDE) [40]:

$$E(w,\ D_t^{\alpha}w,\ D_{h_1}^{\beta}w,\ D_{h_2}^{\gamma}w,\ wD_{h_1}^{\beta}w,\ \ldots)=0,\ \ 0<\alpha,\ \beta,\ \gamma\leq 1, \tag{2}$$

where $w=w(t,\ h_1,\ h_2,\ h_3,\ \ldots,\ h_n)$ is the given function, we employ the EDAM. The solution process involves the following steps:

Step 1: Transformation.

We transform the FPDE into a Nonlinear Ordinary Differential Equation (NODE) using a variable transformation $w(t,\ h_1,\ h_2,\ h_3,\ \ldots,\ h_n)=W(\tau)$, where τ is a function of $t,\ h_1,\ h_2,\ h_3,\ \ldots,\ h_n$. This yields a NODE of the form:

$$F(W,\ W',\ WW',\ \ldots)=0. \tag{3}$$

Step 2: Solution Assumption.

We assume a solution to (3) in the form:

$$W(\tau)=\sum_{l=-F}^{F}s_j(\zeta(\tau))^j, \tag{4}$$

where s_j are parameters to be determined, and $\zeta(\tau)$ satisfies the NODE:

$$\zeta'(\tau)=\ln(N)(\omega+\delta\zeta(\tau)+\upsilon(\zeta(\tau))^2), \tag{5}$$

with $\omega,\ \delta,\ \upsilon$ and $N\neq 1,\ 0$ being constants.

Step 3: Homogeneous Balance.

We determine the positive integer F by balancing the highest-order derivative and the most dominant nonlinear term in (3).

Step 4: Algebraic Equation System.

Substituting (4) into (3) and equating coefficients of like powers of $\zeta(\tau)$ to zero, we obtain a system of nonlinear algebraic equations.

Step 5: Solution of Algebraic Equations.

We solve the system of nonlinear algebraic equations using Maple or other computational tools.

Step 6: Travelling Wave Solutions.

Using (4) and the solution $\zeta(\tau)$ from (5), we obtain the travelling wave solutions to (2) along with the unknown parameters.

The solution of (5) yields families of travelling wave solutions, which can be used to analyze the dynamics of the FPDE.

Family 1 If $\upsilon\neq 0$ and $\Upsilon<0$ are present, where $\Upsilon=\delta^2-4\omega\upsilon$.

$$\zeta_1(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}+\frac{1}{2}\frac{\sqrt{-\Upsilon}\tan\left(\frac{1}{2}\sqrt{-\Upsilon}\tau\right)}{\upsilon},$$

$$\zeta_2(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{-\Upsilon}\cot\left(1/2\sqrt{-\Upsilon}\tau\right)}{\upsilon},$$

$$\zeta_3(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}+\frac{1}{2}\frac{\sqrt{-\Upsilon}\left(\tan\left(\sqrt{-\Upsilon}\tau\right)\pm\left(\sec\left(\sqrt{-\Upsilon}\tau\right)\right)\right)}{\upsilon},$$

$$\zeta_4(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{-\Upsilon}\left(\cot\left(\sqrt{-\Upsilon}\tau\right)\pm\left(\csc\left(\sqrt{-\Upsilon}\tau\right)\right)\right)}{\upsilon},$$

and

$$\zeta_5(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}+\frac{1}{4}\frac{\sqrt{-\Upsilon}\left(\tan\left(\frac{1}{4}\sqrt{-\Upsilon}\tau\right)-\cot\left(\frac{1}{4}\sqrt{-\Upsilon}\tau\right)\right)}{\upsilon}.$$

Family 2 $\upsilon\neq 0$ and $\Upsilon>0$ are present, where $\Upsilon=\delta^2-4\omega\upsilon$.

$$\zeta_6(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\tanh\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon},$$

$$\zeta_7(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\coth\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon},$$

$$\zeta_8(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon},$$

$$\zeta_9(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon},$$

and

$$\zeta_{10}(\tau)=-\frac{1}{2}\frac{\delta}{\upsilon}-\frac{1}{4}\frac{\sqrt{\Upsilon}\left(\tanh\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)-\coth\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}.$$

Family 3 For $\omega\upsilon>0$ and $\delta=0$, we have:

$$\zeta_{11}(\tau) = \sqrt{\frac{\omega}{\upsilon}} \tan\left(\sqrt{\omega\,\upsilon}\tau\right),$$

$$\zeta_{12}(\tau) = -\sqrt{\frac{\omega}{\upsilon}} \cot\left(\sqrt{\omega\,\upsilon}\tau\right),$$

$$\zeta_{13}(\tau) = \sqrt{\frac{\omega}{\upsilon}} \left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right) \pm \left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right),$$

$$\zeta_{14}(\tau) = -\sqrt{\frac{\omega}{\upsilon}} \left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right) \pm \left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right),$$

and

$$\zeta_{15}(\tau) = \frac{1}{2}\sqrt{\frac{\omega}{\upsilon}} \left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right) - \cot\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)\right).$$

Family 4 For $\omega\upsilon < 0$ and $\delta = 0$, we have:

$$\zeta_{16}(\tau) = -\sqrt{-\frac{\omega}{\upsilon}} \tanh\left(\sqrt{-\omega\,\upsilon}\tau\right),$$

$$\zeta_{17}(\tau) = -\sqrt{-\frac{\omega}{\upsilon}} \coth\left(\sqrt{-\omega\,\upsilon}\tau\right),$$

$$\zeta_{18}(\tau) = -\sqrt{-\frac{\omega}{\upsilon}} \left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right) \pm \left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right),$$

$$\zeta_{19}(\Omega) = -\sqrt{-\frac{\omega}{\upsilon}} \left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right) \pm \left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right),$$

and

$$\zeta_{20}(\tau) = -1/2\sqrt{-\frac{\omega}{\upsilon}} \left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right) + \coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right).$$

Family 5 For $\upsilon = \omega$ and $\delta = 0$, we have:

$$\zeta_{21}(\tau) = \tan(\omega\,\tau),$$

$$\zeta_{22}(\eta) = -\cot(\omega\,\tau),$$

$$\zeta_{23}(\tau) = \tan(2\,\omega\,\tau) \pm (\sec(2\,\omega\,\tau)),$$

$$\zeta_{24}(\tau) = -\cot(2\,\omega\,\tau) \pm (\csc(2\,\omega\,\tau)),$$

and

$$\zeta_{25}(\tau) = \frac{1}{2}\tan\left(\frac{1}{2}\omega\,\tau\right) - \frac{1}{2}\cot(1/2\,\omega\,\tau).$$

Family 6 For $\upsilon = -\omega$ and $\delta = 0$, we have:

$$\zeta_{26}(\tau) = -\tanh(\omega\,\tau),$$

$$\zeta_{27}(\tau) = -\coth(\omega\,\tau),$$

$$\zeta_{28}(\tau) = -\tanh(2\,\omega\,\tau) \pm (isech(2\,\omega\,\tau)),$$

$$\zeta_{29}(\tau) = -\coth(2\,\omega\,\tau) \pm (csch(2\,\omega\,\tau)),$$

and

$$\zeta_{30}(\tau) = -\frac{1}{2}\tanh\left(\frac{1}{2}\omega\,\tau\right) - \frac{1}{2}\coth\left(\frac{1}{2}\omega\,\tau\right).$$

Family 7 For $\Upsilon = 0$, we have:

$$\zeta_{31}(\tau) = -2\,\frac{\omega\,(\delta\,\tau\ln(N)+2)}{\delta^2\tau\ln(N)}.$$

Family 8 For $\upsilon = 0$, $\delta = \varsigma$ and $\omega = n\varsigma$ (with $n \neq 0$), we have:

$$\zeta_{32}(\tau) = N^{\varsigma\tau} - n.$$

Family 9 For $\upsilon = \delta = 0$, we have:

$$\zeta_{33}(\Omega) = \omega\tau \ln(N).$$

Family 10 For $\delta = \omega = 0$, we have:

$$\zeta_{34}(\tau) = -\frac{1}{\upsilon\tau ln(N)}.$$

Family 11 For $\delta \neq 0$, $\upsilon \neq 0$ and $\omega = 0$, we have:

$$\zeta_{35}(\tau) = -\frac{\delta}{\upsilon\left(\cosh(\delta\tau) - \sinh(\delta\tau) + 1\right)},$$

and

$$\zeta_{36}(\tau) = -\frac{\delta\left(\cosh(\delta\tau) + \sinh(\delta\tau)\right)}{\upsilon\left(\cosh(\delta\tau) + \sinh(\delta\tau) + 1\right)}.$$

Family 12 As $\delta = \varsigma$, $\upsilon = n\varsigma$, $\omega = 0$:

$$\zeta_{37}(\tau) = \frac{N^{\varsigma\tau}}{1 - nN^{\varsigma\tau}}.$$

3. Implementation of the method

For the fractional Hirota-Satma coupled KdV problem in space-time, we apply the new approach, to illustrate its effectiveness and adaptability. The complex interaction between two long waves is described by this nonlinear model, which has a clearly defined dispersion relation. By putting the new technique into practice, we want to better understand the mechanics of communication between these two waves and provide insight into the intricate phenomena that result from their interaction.

$$\begin{cases} D_t^{\sigma}\varpi = \frac{1}{4}\varpi_{xxx} + 3\varpi\varpi_x + 3(-V^2 + W)_x \\ D_t^{\sigma}V = -\frac{1}{2}V_{xxx} - 3\varpi V_x \\ D_t^{\sigma}W = -\frac{1}{2}W_{xxx} - 3\varpi W_x. \end{cases} \tag{6}$$

The transformations we use are based on the space-time fractional Hirota-Satsuma linked KdV equation, to facilitate the solution process: $\varpi = \varpi(x,\, t)$, $V = V(x,\, t)$, and $W = W(x,\, t)$ are functions of space x and time t, where $t > 0$ and $0 < \sigma \leq 1$.

$$\begin{cases} \varpi = \dfrac{1}{\Xi}\varpi(\tau)^2 \\ V = -\Xi + \varpi(\tau) \\ W = 2\Xi^2 - 2\Xi\varpi(\tau). \end{cases} \tag{7}$$

where $\tau = x - \dfrac{\Xi}{\sigma}\left(t + \dfrac{1}{\Gamma(1+\sigma)}\right)^{\sigma}$. Then (6) is reduced to the following ODE

$$\Xi\varpi'' - 2\Xi^2\varpi^2 + 2\varpi^3 = 0. \tag{8}$$

$F = 1$ is obtained by applying the homogeneous balancing rule to (8). Consequently,

$$\varpi(\tau) = \sum_{i=-1}^{1} d_i(\varpi(\tau))^i. \tag{9}$$

When (9) is added to (8), all terms with the same orders of $\varpi(\tau)$ are gathered to create an equation in $\varpi(\tau)$. If you set all of the formula's coefficients to zero, you can reduce it to a system of nonlinear algebraic equations. The following problem can be solved in two different ways using Maple:

Case 1

$$\Xi = -\frac{1}{4}(\ln(H))^2\Upsilon,\ d_{-1} = \frac{1}{2}\sqrt{\Upsilon}(\ln(H))^2\omega,\ d_0 = 1/4\sqrt{\Upsilon}(\ln(H))^2(\eta),\ d_1 = 0. \tag{10}$$

Case 2

$$\Xi = -\frac{1}{4}(\ln(H))^2\Upsilon,\ d_{-1} = 0,\ d_0 = \frac{1}{4}\sqrt{\Upsilon}(\ln(H))^2(\eta),\ d_1 = \frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2. \tag{11}$$

Under the assumption of scenario 1, the following families of soliton solutions for (8) are obtained.

1.1 When $\Upsilon > 0;\ \upsilon \neq 0$, we have:

$$\varpi_{1,\,1}(x,\,t) = \frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}(\ln(H))^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon} - \frac{1}{2}\frac{\sqrt{\Upsilon}\tanh\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1} + \frac{1}{4}\sqrt{\Upsilon}(\ln(H))^2(\eta)\right)^2, \tag{12}$$

$$V_{1,\,1}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\tanh\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1}+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\,, \tag{13}$$

$$W_{1,\,1}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\tanh\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1}+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right), \tag{14}$$

$$\varpi_{1,\,2}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\coth\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1}+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right)^{2}, \tag{15}$$

$$V_{1,\,2}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\coth\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1}+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\,, \tag{16}$$

$$W_{1,\,2}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\coth\left(\frac{1}{2}\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)^{-1}+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right), \tag{17}$$

$$\varpi_{1,\,3}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}\right.$$
$$\left.+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right)^{2}, \tag{18}$$

$$V_{1,\,3}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}$$
$$+\frac{1}{4}\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\,, \tag{19}$$

$$W_{1,\,3}(x,\,t)=2\Xi^2-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}\right.$$

$$\left.+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\left(\eta\right)\right),\tag{20}$$

$$\varpi_{1,\,4}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/2\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}\right.$$

$$\left.+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\left(\eta\right)\right)^2,\tag{21}$$

$$V_{1,\,4}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/2\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}$$

$$+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\left(\eta\right),\tag{22}$$

$$W_{1,\,4}(x,\,t)=2\Xi^2-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/2\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)^{-1}\right.$$

$$\left.+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\left(\eta\right)\right),\tag{23}$$

and

$$\varpi_{1,\,5}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/4\frac{\sqrt{\Upsilon}\left(\tanh\left(1/4\sqrt{\Upsilon}\tau\right)-\coth\left(1/4\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right)^{-1}\right.$$

$$\left.+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\left(\eta\right)\right)^2.\tag{24}$$

$$V_{1,\,5}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/4\,\frac{\sqrt{\Upsilon}\left(\tanh\left(1/4\,\sqrt{\Upsilon}\tau\right)-\coth\left(1/4\,\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right)^{-1}$$

$$+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right). \tag{25}$$

$$W_{1,\,5}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/4\,\frac{\sqrt{\Upsilon}\left(\tanh\left(1/4\,\sqrt{\Upsilon}\tau\right)-\coth\left(1/4\,\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right)^{-1}\right.$$

$$\left.+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)\right). \tag{26}$$

1.2 When $\omega\upsilon>0;\ \eta=0,\ \Upsilon>0$, we have

$$\varpi_{1,\,6}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right)^{2}, \tag{27}$$

$$V_{1,\,6}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}, \tag{28}$$

$$W_{1,\,6}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right), \tag{29}$$

$$\varpi_{1,\,16}(x,\,t)=\frac{1}{\Xi}\left(-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right)^{2}, \tag{30}$$

$$V_{1,\,7}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1} \tag{31}$$

$$W_{1,\,7}(x,\,t)=2\Xi^{2}-2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right), \tag{32}$$

$$\varpi_{1,\,8}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right)^{2},\tag{33}$$

$$V_{1,\,8}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1},\tag{34}$$

$$W_{1,\,8}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right),\tag{35}$$

$$\varpi_{1,\,9}(x,\,t)=\frac{1}{\Xi}\left(-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right)^{2},\tag{36}$$

$$V_{1,\,9}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1},\tag{37}$$

$$W_{1,\,9}(x,\,t)=2\Xi^{2}-2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right),\tag{38}$$

and

$$\varpi_{1,\,10}(x,\,t)=\frac{1}{\Xi}\left(\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right)^{2}.\tag{39}$$

$$V_{1,\,10}(x,\,t)=-\Xi+\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}.\tag{40}$$

$$W_{1,\,10}(x,\,t)=2\Xi^{2}-2\Xi\left(\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{\frac{\omega}{\upsilon}}}\left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right)^{-1}\right).\tag{41}$$

1.3 When $\eta = 0;\ \omega\upsilon < 0,\ \Upsilon > 0$, we have:

$$\varpi_{1,\,11}(x,\,t) = \frac{1}{V}\left(-\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right)^2, \tag{42}$$

$$V_{1,\,11}(x,\,t) = -\Xi - \frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}, \tag{43}$$

$$W_{1,\,11}(x,\,t) = 2\Xi^2 - 2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right), \tag{44}$$

$$\varpi_{1,\,12}(x,\,t) = \frac{1}{\Xi}\left(-\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right)^2, \tag{45}$$

$$V_{1,\,12}(x,\,t) = -\Xi - \frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}, \tag{46}$$

$$W_{1,\,12}(x,\,t) = 2\Xi^2 - 2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right), \tag{47}$$

$$\varpi_{1,\,13}(x,\,t) = \frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right) \pm \left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right)^2, \tag{48}$$

$$V_{1,\,13}(x,\,t) = -\Xi - 1/2\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right) \pm \left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1} \tag{49}$$

$$W_{1,\,13}(x,\,t) = 2\Xi^2 - 2\Xi\left(-1/2\sqrt{\Upsilon}\,(\ln(H))^2\,\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right) \pm \left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right), \tag{50}$$

$$\varpi_{1,\,14}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right)^{2},\tag{51}$$

$$V_{1,\,14}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1},\tag{52}$$

$$W_{1,\,14}(x,\,t)=2\Xi^{2}-2\Xi\left(-1/2\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^{-1}\right),\tag{53}$$

and

$$\varpi_{1,\,15}(x,\,t)=\frac{1}{\Xi}\left(-\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right).\tag{54}$$

$$V_{1,\,15}(x,\,t)=-\Xi-\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}.\tag{55}$$

$$W_{1,\,15}(x,\,t)=2\Xi^{2}-2\Xi\left(-\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega\frac{1}{\sqrt{-\frac{\omega}{\upsilon}}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right)^{-1}\right).\tag{56}$$

1.4 Suppose $\upsilon=\omega;\ \eta=0,\ \Upsilon>0$, we have:

$$\varpi_{1,\,16}(x,\,t)=\frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega}{\tan\left(\omega\,\tau\right)}\right)^{2},\tag{57}$$

$$V_{1,\,16}(x,\,t)=-\Xi+1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega}{\tan\left(\omega\,\tau\right)},\tag{58}$$

$$W_{1,\,16}(x,\,t)=2\lambda^{2}-2\lambda\left(1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\omega}{\tan\left(\omega\,\tau\right)}\right),\tag{59}$$

$$\varpi_{1,\,17}(x,\,t) = \frac{1}{\Xi}\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\cot(\omega\,\tau)}\right)^2, \tag{60}$$

$$V_{1,\,17}(x,\,t) = -\Xi - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\cot(\omega\,\tau)}, \tag{61}$$

$$W_{1,\,17}(x,\,t) = 2\Xi^2 - 2\Xi\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\cot(\omega\,\tau)}\right), \tag{62}$$

$$\varpi_{1,\,18}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))}\right)^2, \tag{63}$$

$$V_{1,\,18}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))}, \tag{64}$$

$$W_{1,\,18}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))}\right), \tag{65}$$

$$\varpi_{1,\,19}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))}\right)^2, \tag{66}$$

$$V_{1,\,19}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))}, \tag{67}$$

$$W_{1,\,19}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))}\right), \tag{68}$$

and

$$\varpi_{1,\,20}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{1/2\tan(1/2\,\omega\,\tau) - 1/2\cot(1/2\,\omega\,\tau)}\right)^2 \tag{69}$$

$$V_{1,\,20}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{1/2\tan(1/2\,\omega\,\tau) - 1/2\cot(1/2\,\omega\,\tau)}. \tag{70}$$

$$W_{1,\,20}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{1/2\tan(1/2\,\omega\,\tau) - 1/2\cot(1/2\,\omega\,\tau)}\right). \tag{71}$$

1.5 When $\upsilon = -\omega;\ \eta = 0,\ \Upsilon > 0$, we have:

$$\varpi_{1,\,21}(x,\,t) = \frac{1}{\Xi}\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tanh(\omega\,\tau)}\right)^2, \tag{72}$$

$$V_{1,\,21}(x,\,t) = -\Xi - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tanh(\omega\,\tau)}, \tag{73}$$

$$W_{1,\,21}(x,\,t) = 2\Xi^2 - 2\Xi\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\tanh(\omega\,\tau)}\right), \tag{74}$$

$$\varpi_{1,\,22}(x,\,t) = \frac{1}{\Xi}\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\coth(\omega\,\tau)}\right)^2, \tag{75}$$

$$V_{1,\,22}(x,\,t) = -\Xi - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\coth(\omega\,\tau)}, \tag{76}$$

$$W_{1,\,22}(x,\,t) = 2\Xi^2 - 2\Xi\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{\coth(\omega\,\tau)}\right), \tag{77}$$

$$\varpi_{1,\,23}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\tanh(2\,\omega\,\tau) \pm (isech(2\,\omega\,\tau))}\right)^2, \tag{78}$$

$$V_{1,\,23}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\tanh(2\,\omega\,\tau) \pm (isech(2\,\omega\,\tau))}, \tag{79}$$

$$W_{1,\,23}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\tanh(2\,\omega\,\tau) \pm (isech(2\,\omega\,\tau))}\right), \tag{80}$$

$$\varpi_{1,\,24}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\coth(2\,\omega\,\tau) \pm (csch(2\,\omega\,\tau))}\right)^2, \tag{81}$$

$$V_{1,\,24}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\coth(2\,\omega\,\tau) \pm (csch(2\,\omega\,\tau))}, \tag{82}$$

$$W_{1,\,24}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\omega}{-\coth(2\,\omega\,\tau) \pm (csch(2\,\omega\,\tau))}\,\eta\right), \tag{83}$$

and

$$\varpi_{1,\,25}(x,\,t)=\frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{-1/2\,\tanh(1/2\,\omega\,\tau)-1/2\,\coth(1/2\,\omega\,\tau)}\right)^{2}. \tag{84}$$

$$V_{1,\,25}(x,\,t)=-\Xi+1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{-1/2\,\tanh(1/2\,\omega\,\tau)-1/2\,\coth(1/2\,\omega\,\tau)}. \tag{85}$$

$$W_{1,\,25}(x,\,t)=2\Xi^{2}-2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{-1/2\,\tanh(1/2\,\omega\,\tau)-1/2\,\coth(1/2\,\omega\,\tau)}\right). \tag{86}$$

1.6 When $\eta=\varsigma;\ \omega=n\varsigma(n\neq 0);\ \upsilon=0,\ \Upsilon>0$, we have:

$$\varpi_{1,\,26}(x,\,t)=\frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{H^{\tau\varsigma}-n}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right)^{2}. \tag{87}$$

$$V_{1,\,26}(x,\,t)=-\Xi+1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{H^{\tau\varsigma}-n}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta). \tag{88}$$

$$W_{1,\,26}(x,\,t)=2\Xi^{2}-2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}\,\omega}{H^{\tau\varsigma}-n}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\zeta)\right). \tag{89}$$

1.7 When $\eta=0;\ \upsilon=0;\ \omega\neq 0,\ \Upsilon>0$,

$$\varpi_{1,\,27}(x,\,t)=\frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}}{\tau\ln(H)}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right)^{2}, \tag{90}$$

$$V_{1,\,27}(x,\,t)=-\Xi+1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}}{\tau\ln(H)}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta), \tag{91}$$

$$W_{1,\,27}(x,\,t)=2\Xi^{2}-2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^{2}}{\tau\ln(H)}+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right), \tag{92}$$

1.8 When $\omega=0,\ \Upsilon>0$, we have:

$$\varpi_{1,\,28}(x,\,t)=\frac{1}{\Xi}\left(1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta)\right)^{2}. \tag{93}$$

$$V_{1,\,28}(x,\,t)=-\Xi+1/4\,\sqrt{\Upsilon}\,(\ln(H))^{2}\,(\eta). \tag{94}$$

$$W_{1,\,28}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta)\right). \tag{95}$$

1.9 When $\eta = \varsigma;\ \upsilon = n\varsigma;\ \alpha = 0,\ \Upsilon > 0$, we have:

$$\varpi_{1,\,29}(x,\,t) = \frac{1}{\Xi}\left(1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(1-nH^{\tau\varsigma}\right)}{H^{\tau^2}} + 1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta)\right)^2. \tag{96}$$

$$V_{1,\,29}(x,\,t) = -\Xi + 1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(1-nH^{\tau\varsigma}\right)}{H^{\tau^2}} + 1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta). \tag{97}$$

$$W_{1,\,29}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/2\,\frac{\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2\omega\left(1-nH^{\tau\varsigma}\right)}{H^{\tau\varsigma}} + 1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta)\right). \tag{98}$$

Now consider case 2, we have:
Household 2.1 When $\Upsilon > 0;\ \upsilon \neq 0$, we have:

$$\varpi_{2,\,1}(x,\,t) = \frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-1/2\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\tanh\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)\right)^2, \tag{99}$$

$$V_{2,\,1}(x,\,t) = -\Xi + 1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-1/2\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\tanh\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right), \tag{100}$$

$$W_{2,\,1}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-1/2\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\tanh\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)\right), \tag{101}$$

$$\varpi_{2,\,2}(x,\,t) = \frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-1/2\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\coth\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)\right)^2, \tag{102}$$

$$V_{2,\,2}(x,\,t) = -\Xi + 1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-1/2\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\coth\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right), \tag{103}$$

$$W_{2,\,2}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^2(\eta) + 1/2\sqrt{\Upsilon}\upsilon\left(\ln\left(H\right)\right)^2\left(-\frac{1}{2}\,\frac{\eta}{\upsilon} - 1/2\,\frac{\sqrt{\Upsilon}\coth\left(1/2\sqrt{\Upsilon}\tau\right)}{\upsilon}\right)\right), \tag{104}$$

$$\varpi_{2,\,3}(x,\,t)=\frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+1/2\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-1/2\,\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)\right)^{2}, \tag{105}$$

$$V_{2,\,3}(x,\,t)=-\Xi+1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}$$

$$\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\,\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right), \tag{106}$$

$$W_{2,\,3}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\,\frac{\sqrt{\Upsilon}\left(\tanh\left(\sqrt{\Upsilon}\tau\right)\pm\left(sech\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)\right), \tag{107}$$

$$\varpi_{2,\,4}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\,\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)\right)^{2}, \tag{108}$$

$$V_{2,\,4}(x,\,t)=-\Xi+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+1/2\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}$$

$$\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\,\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right) \tag{109}$$

$$W_{2,\,4}(x,\,t)=2\Xi^{2}-2\Xi\left(1/4\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{2}\,\frac{\sqrt{\Upsilon}\left(\coth\left(\sqrt{\Upsilon}\tau\right)\pm\left(csch\left(\sqrt{\Upsilon}\tau\right)\right)\right)}{\upsilon}\right)\right), \tag{110}$$

and

$$\varpi_{2,\,5}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{4}\frac{\sqrt{\Upsilon}\left(\tanh\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)-\coth\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right)\right)^{2}. \tag{111}$$

$$V_{2,\,5}(x,\,t)=-\Xi+\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}$$

$$\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{4}\frac{\sqrt{\Upsilon}\left(\tanh\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)-\coth\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right). \tag{112}$$

$$W_{2,\,5}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{4}\sqrt{\Upsilon}\left(\ln\left(H\right)\right)^{2}\left(\eta\right)+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\right.$$

$$\left.\left(-\frac{1}{2}\frac{\eta}{\upsilon}-\frac{1}{4}\frac{\sqrt{\Upsilon}\left(\tanh\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)-\coth\left(\frac{1}{4}\sqrt{\Upsilon}\tau\right)\right)}{\upsilon}\right)\right). \tag{113}$$

Household 2.2 When $\upsilon\omega>0;\ \eta=0,\ \Upsilon>0$, we have:

$$\varpi_{2,\,6}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\tan\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{2}, \tag{114}$$

$$V_{2,\,6}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\tan\left(\sqrt{\omega\,\upsilon}\tau\right), \tag{115}$$

$$W_{2,\,6}(x,\,t)=2\Xi^{2}-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\tan\left(\sqrt{\omega\,\upsilon}\tau\right)\right), \tag{116}$$

$$\varpi_{2,\,7}(x,\,t)=\frac{1}{\Xi}\left(-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\cot\left(\sqrt{\omega\,\upsilon}\tau\right)\right)^{2}, \tag{117}$$

$$V_{2,\,7}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\cot\left(\sqrt{\omega\,\upsilon}\tau\right), \tag{118}$$

$$W_{2,\,7}(x,\,t)=2\Xi^{2}-2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,\left(\ln\left(H\right)\right)^{2}\sqrt{\frac{\omega}{\upsilon}}\cot\left(\sqrt{\omega\,\upsilon}\tau\right)\right), \tag{119}$$

$$\varpi_{2,\,8}(x,\,t)=\frac{1}{\Xi}\left(\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)\right)^2, \tag{120}$$

$$V_{2,\,8}(x,\,t)=-\Xi+\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right), \tag{121}$$

$$W_{2,\,8}(x,\,t)=2\Xi^2-2\Xi\left(\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\sec\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)\right), \tag{122}$$

$$\varpi_{2,\,9}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)\right)^2, \tag{123}$$

$$V_{2,\,9}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right), \tag{124}$$

$$W_{2,\,9}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\cot\left(2\sqrt{\omega\,\upsilon}\tau\right)\pm\left(\csc\left(2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)\right), \tag{125}$$

and

$$\varpi_{2,\,10}(x,\,t)=\frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(1/2\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right)\right)^2. \tag{126}$$

$$V_{2,\,10}(x,\,t)=-\Xi+1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right). \tag{127}$$

$$W_{2,\,10}(x,\,t)=2\Xi^2-2\Xi\left(1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{\frac{\omega}{\upsilon}}\left(\tan\left(\frac{1}{2}\sqrt{\omega\,\upsilon}\tau\right)-\cot\left(1/2\sqrt{\omega\,\upsilon}\tau\right)\right)\right). \tag{128}$$

Household 2.3 When $\eta=0;\ \upsilon\omega<0,\ \Upsilon>0$, we have:

$$\varpi_{2,\,11}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^2, \tag{129}$$

$$V_{2,\,11}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right), \tag{130}$$

$$W_{2,\,11}(x,\,t)=2\Xi^2-2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\tanh\left(\sqrt{-\omega\,\upsilon}\tau\right)\right), \tag{131}$$

$$\varpi_{2,\,12}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\coth\left(\sqrt{-\omega\,\upsilon}\tau\right)\right)^2, \tag{132}$$

$$V_{2,\,12}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\coth\left(\sqrt{-\omega\,\upsilon}\tau\right), \tag{133}$$

$$W_{2,\,17}(x,\,t)=2\Xi^2-2\Xi\left(-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\coth\left(\sqrt{-\omega\,\upsilon}\tau\right)\right), \tag{134}$$

$$\varpi_{2,\,12}(x,\,t)=\frac{1}{\Xi}\left(-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)\right)^2, \tag{135}$$

$$V_{2,\,13}(x,\,t)=-\Xi-\frac{1}{2}\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right), \tag{136}$$

$$W_{2,\,13}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(isech\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)\right), \tag{137}$$

$$\varpi_{2,\,14}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)\right)^2, \tag{138}$$

$$V_{2,\,14}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right), \tag{139}$$

$$W_{2,\,14}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\coth\left(2\sqrt{-\omega\,\upsilon}\tau\right)\pm\left(csch\left(2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)\right), \tag{140}$$

and

$$\varpi_{2,\,15}(x,\,t)=\frac{1}{\Xi}\left(-1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right)^2. \tag{141}$$

$$Vi_{2,\,15}(x,\,t)=-\Xi-1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right). \tag{142}$$

$$W_{2,\,15}(x,\,t)=2\Xi^2-2\Xi\left(-1/4\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\sqrt{-\frac{\omega}{\upsilon}}\left(\tanh\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)+\coth\left(1/2\sqrt{-\omega\,\upsilon}\tau\right)\right)\right). \tag{143}$$

Household 2.4 When $\upsilon=\omega;\ \eta=0,\ \Upsilon>0$, we have:

$$\varpi_{2,\,16}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tan(\omega\,\tau)\right)^2, \tag{144}$$

$$V_{2,\,16}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tan(\omega\,\tau), \tag{145}$$

$$W_{2,\,16}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tan(\omega\,\tau)\right), \tag{146}$$

$$\varpi_{2,\,17}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\cot(\omega\,\tau)\right)^2, \tag{147}$$

$$V_{2,\,17}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tan(\omega\,\tau), \tag{148}$$

$$W_{2,\,17}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tan(\omega\,\tau)\right), \tag{149}$$

$$\varpi_{2,\,18}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))\right)\right)^2, \tag{150}$$

$$V_{2,\,18}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))\right), \tag{151}$$

$$W_{2,\,18}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(\tan(2\,\omega\,\tau)\pm(\sec(2\,\omega\,\tau))\right)\right) \tag{152}$$

$$\varpi_{2,\,19}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))\right)\right)^2, \tag{153}$$

$$V_{2,\,19}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))\right) \tag{154}$$

$$W_{2,\,19}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\cot(2\,\omega\,\tau)\pm(\csc(2\,\omega\,\tau))\right)\right), \tag{155}$$

and

$$\varpi_{2,\,20}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(1/2\tan(1/2\,\omega\,\tau)-1/2\cot(1/2\,\omega\,\tau)\right)\right)^2. \tag{156}$$

$$V_{2,\,20}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(1/2\tan(1/2\,\omega\,\tau)-1/2\cot(1/2\,\omega\,\tau)\right). \tag{157}$$

$$W_{2,\,20}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(1/2\tan(1/2\,\omega\,\tau)-1/2\cot(1/2\,\omega\,\tau)\right)\right). \tag{158}$$

Household 2.5 When $\upsilon=-\omega;\ \eta=0,\ \Upsilon>0$, we have:

$$\varpi_{2,\,21}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tanh(\omega\,\tau)\right)^2, \tag{159}$$

$$V_{2,\,21}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tanh(\omega\,\tau), \tag{160}$$

$$W_{2,\,21}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Pi}\upsilon\,(\ln(\beta))^2\tanh(\omega\,\tau)\right), \tag{161}$$

$$\varpi_{2,\,22}(x,\,t)=\frac{1}{\Xi}\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\coth(\omega\,\tau)\right)^2, \tag{162}$$

$$V_{2,\,22}(x,\,t)=-\Xi-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tanh(\omega\,\tau)\Big)^2, \tag{163}$$

$$W_{2,\,22}(x,\,t)=2\Xi^2-2\Xi\left(-1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\tanh(\omega\,\tau)\right)^2, \tag{164}$$

$$\varpi_{2,\,23}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\tanh(2\,\omega\,\tau)\pm(isech(2\,\omega\,\tau))\right)\right)^2, \tag{165}$$

$$V_{2,\,23}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\tanh(2\,\omega\,\tau)\pm(isech(2\,\omega\,\tau))\right), \tag{166}$$

$$W_{2,\,23}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\tanh(2\,\omega\,\tau)\pm(isech(2\,\omega\,\tau))\right)\right) \tag{167}$$

$$\varpi_{2,\,24}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\coth(2\,\omega\,\tau)\pm(csch(2\,\omega\,\tau))\right)\right)^2, \tag{168}$$

$$V_{2,\,24}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\coth(2\,\omega\,\tau)\pm(csch(2\,\omega\,\tau))\right) \tag{169}$$

$$W_{2,\,24}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-\coth(2\,\omega\,\tau)\pm(csch(2\,\omega\,\tau))\right)\right), \tag{170}$$

and

$$\varpi_{2,\,25}(x,\,t)=\frac{1}{\Xi}\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-1/2\tanh(1/2\,\omega\,\tau)-1/2\coth(1/2\,\omega\,\tau)\right)\right)^2. \tag{171}$$

$$V_{2,\,25}(x,\,t)=-\Xi+1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-1/2\tanh(1/2\,\omega\,\tau)-1/2\coth(1/2\,\omega\,\tau)\right). \tag{172}$$

$$W_{2,\,25}(x,\,t)=2\Xi^2-2\Xi\left(1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\left(-1/2\tanh(1/2\,\omega\,\tau)-1/2\coth(1/2\,\omega\,\tau)\right)\right) \tag{173}$$

Household 2.6 When $\eta = \varsigma;\ \omega = n\tau;\ \upsilon = 0,\ \Upsilon > 0$,

$$\varpi_{2,\,26}(x,\,t) = \frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) + 1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\,(H^{\varsigma\tau} - n)\right)^2. \tag{174}$$

$$V_{2,\,26}(x,\,t) = -\Xi + 1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\zeta) + 1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\,(H^{\varsigma\tau} - n) \tag{175}$$

$$W_{2,\,26}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\zeta) + 1/2\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\,(H^{\varsigma\tau} - n)\right) \tag{176}$$

Household 2.7 When $\eta = 0;\ \omega = 0,\ \Upsilon > 0$, we have:

$$\varpi_{2,\,27}(x,\,t) = \frac{-1}{\Xi}\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2}{\tau\ln(H)}\right)^2. \tag{177}$$

$$V_{2,\,27}(x,\,t) = -\Xi - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2}{\tau\ln(H)}. \tag{178}$$

$$W_{2,\,27}(x,\,t) = 2\Xi^2 - 2\Xi\left(-1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2}{\tau\ln(H)}\right). \tag{179}$$

Household 2.8 When $\omega = 0;\ \eta \neq 0;\ \upsilon \neq 0,\ \Upsilon > 0$,

$$\varpi_{2,\,28}(x,\,t) = \frac{-1}{\Xi}\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\eta}{\cosh(\eta\,\tau) - \sinh(\eta\,\tau) + 1}\right)^2, \tag{180}$$

$$V_{2,\,28}(x,\,t) = -\Xi + 1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\eta}{\cosh(\eta\,\tau) - \sinh(\eta\,\tau) + 1}, \tag{181}$$

$$W_{2,\,28}(x,\,t) = 2\Xi^2 - 2\lambda\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) - 1/2\,\frac{\sqrt{\Upsilon}\,(\ln(H))^2\,\eta}{\cosh(\eta\,\tau) - \sinh(\eta\,\tau) + 1}\right), \tag{182}$$

Household 2.9 When $\eta = \varsigma;\ \upsilon = n\varsigma;\ \omega = 0,\ \Upsilon > 0$, we have:

$$\varpi_{2,\,29}(x,\,t) = \frac{1}{\Xi}\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) + 1/2\,\frac{\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\,H^{\tau\varsigma}}{1 - nH^{\tau\varsigma}}\right)^2. \tag{183}$$

$$V_{2,\,29}(x,\,t) = -\Xi + 1/4\sqrt{\Upsilon}\,(\ln(H))^2\,(\eta) + 1/2\,\frac{\sqrt{\Upsilon}\upsilon\,(\ln(H))^2\,H^{\tau\varsigma}}{1 - nH^{\tau\varsigma}}. \tag{184}$$

$$W_{2,\,29}(x,\,t) = 2\Xi^2 - 2\Xi\left(1/4\sqrt{\Upsilon}\,(\ln(H))^2(\zeta) + 1/2\,\frac{\sqrt{\Upsilon}\upsilon\,(\ln(H))^2 H^{\tau\varsigma}}{1 - nH^{\tau\varsigma}}\right). \tag{185}$$

4. Graphics and interpretations

This novel study analyses the Hirota-Satsuma fractional order equation using the Extended Differential Algebraic Method (EDAM), providing new information on the dynamics of multidimensional wave patterns and soliton structures. Our study's outcomes show how EDAM may reliably and effectively identify coherent patterns that differentiate between different stages of nonlinear reaction-diffusion systems. Pattern generation, nonlinear wave propagation, and thermodynamic processes in fractional order systems are only a few of the physical phenomena and temporal development processes that are better understood thanks to the discovered solutions. Short, rapid oscillations that swiftly transition between stable states are a defining feature of the wide range of patterns seen in the ensuing soliton solutions. To comprehend the behaviour of physical processes in Hirota-Satsuma fractional order equation-based systems, such as optical communications and condensed matter physics, it is crucial to identify these soliton waves.

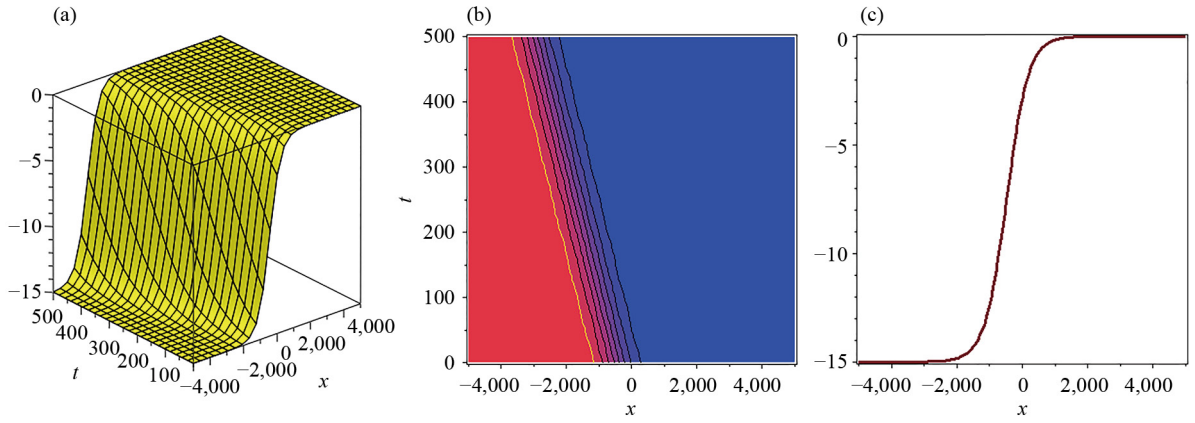


Figure 1. 3-dimensional, contour and 2-dimensional soliton solutions are plotted for Equation (12) with $\eta = 0.4$; $\omega = 1$; $\upsilon = 11$; $H = e$; $\sigma = 0.5$; $\Xi = 0.1$

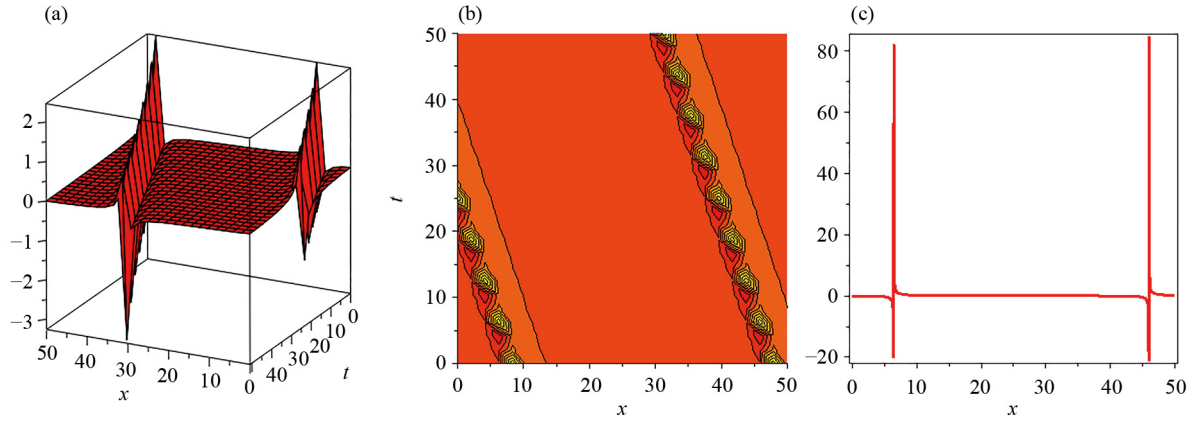


Figure 2. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (16) with $\eta = 0.14$; $\omega = 11$; $\upsilon = 1.1$; $H = e$; $\sigma = 0.15$; $\Xi = 0.1$

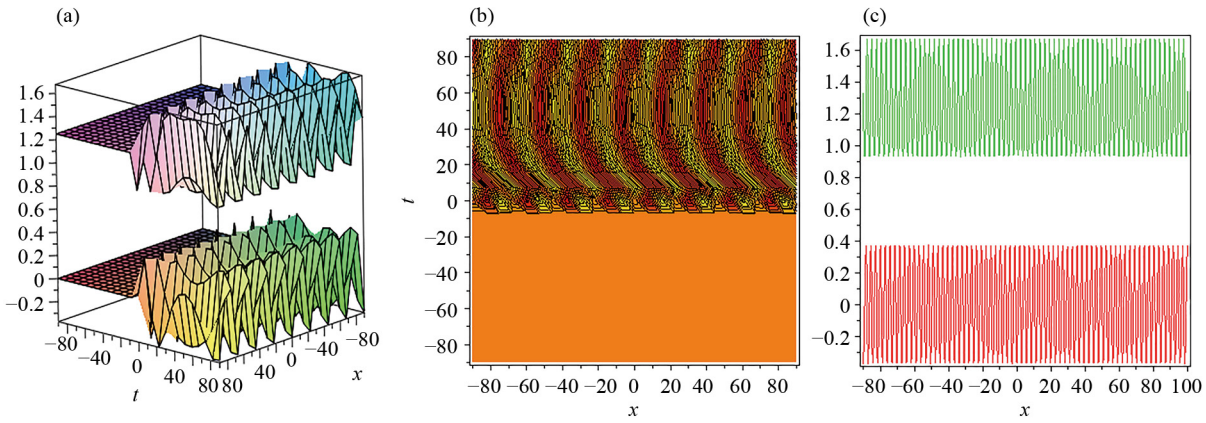


Figure 3. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (19) with $\eta = 0.4$; $\omega = 0.1$; $\upsilon = 11$; $H = e$; $\sigma = 0.05$; $\Xi = 0.01$

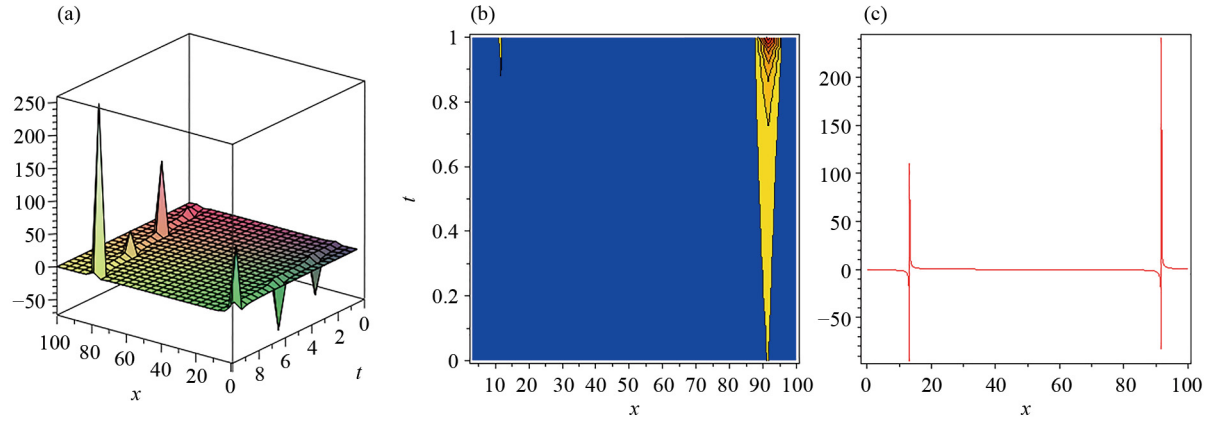


Figure 4. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (25) with $\eta = 0.4$; $\omega = 1$; $\upsilon = 11$; $H = e$; $\sigma = 0.005$; $\Xi = 0.01$

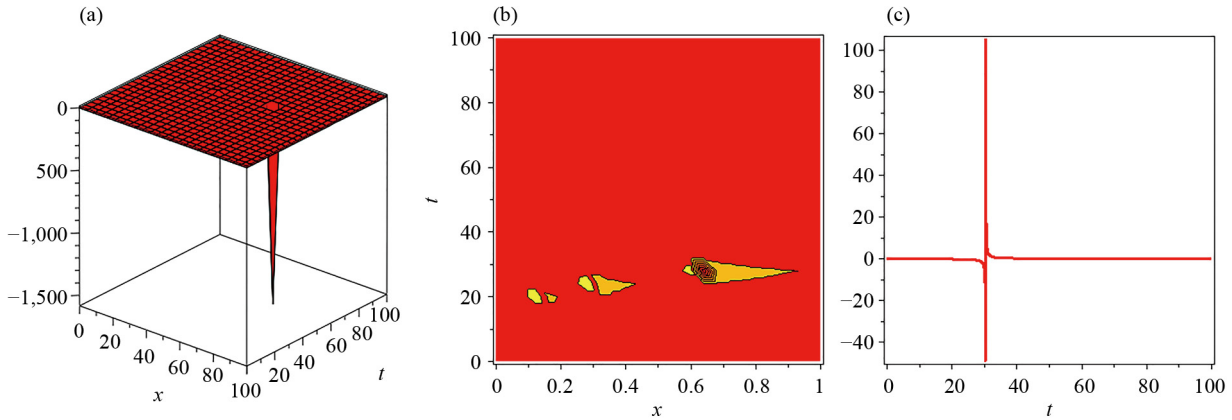


Figure 5. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (115) with $\eta = 0.04$; $\omega = 0.1$; $\upsilon = 11$; $H = e$; $\sigma = 0.35$; $\Xi = 0.1$

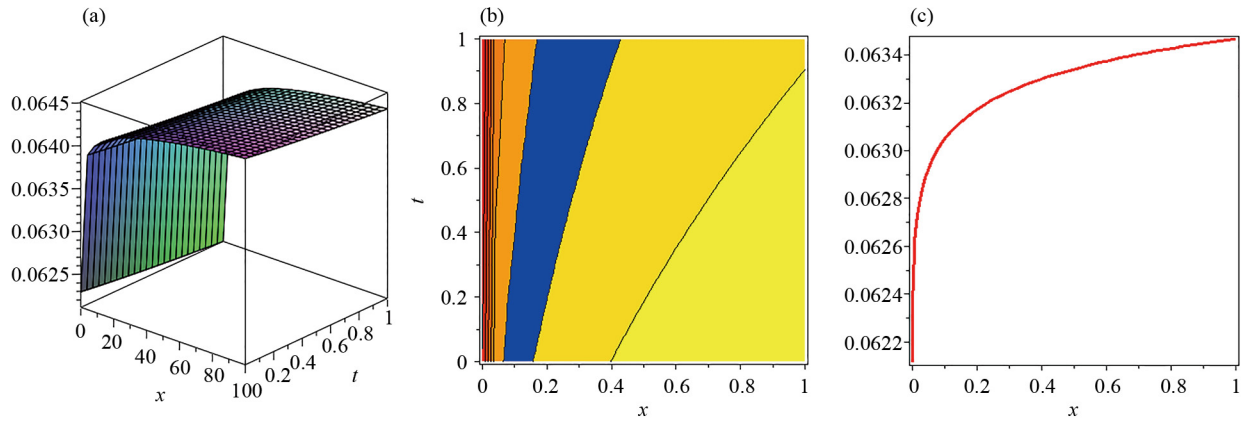


Figure 6. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (120) with $\eta = 0.4$; $\omega = 1$; $\upsilon = 11$; $H = e$; $\sigma = 0.45$; $\Xi = 0.41$

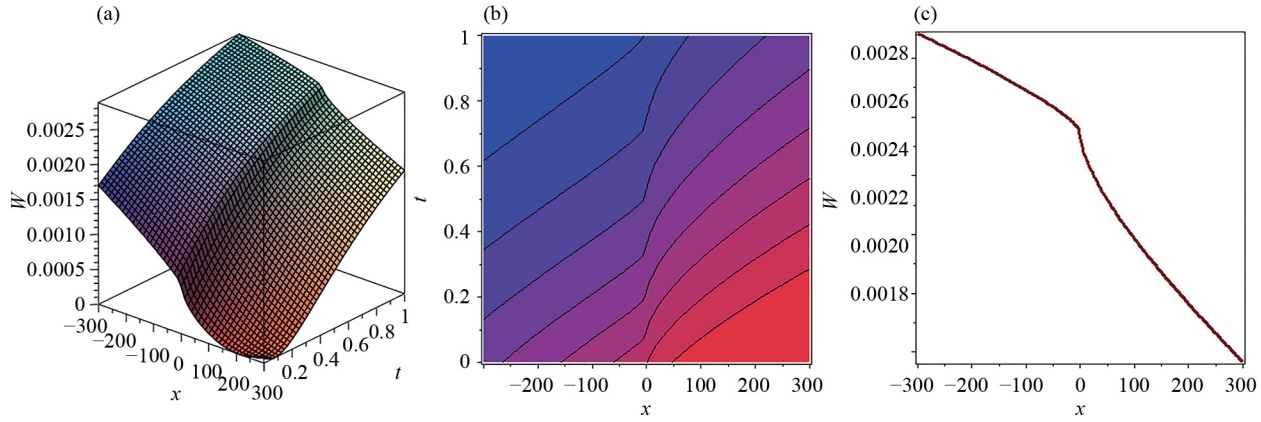


Figure 7. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (121) with $\eta = 0.4$; $\omega = 0.1$; $\upsilon = 1.1$; $H = e$; $\sigma = 1.5$; $\Xi = 0.1$

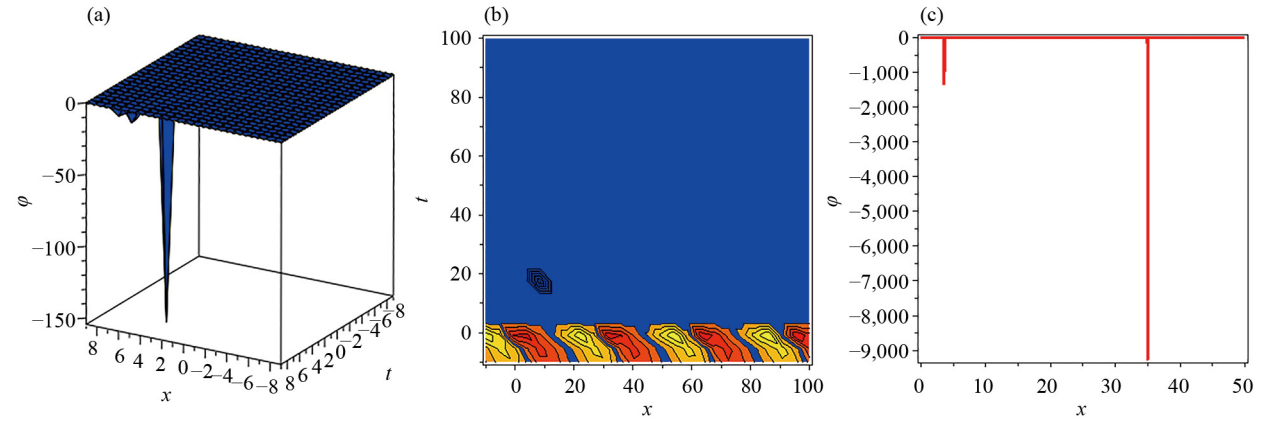


Figure 8. In this figure, 3-dimensional, contour & 2-dimensional soliton solutions are plotted for Eq. (125) with $\eta = 0.14$; $\omega = 0.81$; $\upsilon = 11$; $H = e$; $\sigma = 0.65$; $\Xi = 0.1$

Figures 1-8 illustrate the soliton solutions of the fractional Hirota-Satsuma coupled KdV system for different parameter choices. Figure 1 corresponds to the soliton solution of Equation (12), while Figures 2, 3, and 4 display the solutions associated with Equations (16), (19), and (25), respectively. Moreover, Figure 5 presents the soliton structures obtained from Equation (115), whereas Figures 6 and 7 depict the solutions of Equations (120) and (121). Finally, Figure 8 illustrates the soliton solution corresponding to Equation (125). These figures collectively demonstrate the influence of the fractional parameter on the shape, amplitude, and localization of the obtained soliton solutions.

5. Conclusion

Hirota satsuma coupled KdV equation were successfully investigated using the extended direct algebraic method. The resulting solutions demonstrate the complex interactions and stability of these intricate structures, offering important insights into the dynamic behaviour of solitons in nonlinear systems. The soliton dynamics are further clarified by the graphical representations of the solutions, which provide a deeper comprehension of the physics at play. The findings of this study add to our understanding of fractional calculus and nonlinear dynamics, which may find use in physics, engineering, and optics, among other domains.

Author contributions

Conceptualization, M.V.C., P.O.M., and K.K.A.; Funding acquisition, P.O.M. and M.V.C.; Investigation, M.B., W.W.M., and M.A.Y.; Methodology, M.B., W.W.M., and M.A.Y.; Project administration, P.O.M. and M.V.C.; Software, M.B. and M.A.Y.; Supervision, P.O.M. and M.V.C.; Writing-original draft, M.A.Y., W.W.M. and M.B.; Writing-review & editing, M.V.C., P.O.M., and K.K.A. All authors have read and agreed to the published version of the manuscript.

Conflict of interest

The authors declare no competing financial interest.

References

[1] Sher M, Shah K, Ali Z, Abdeljawad T, Alqudah M. Using deep neural network in computational analysis of coupled systems of fractional integro-differential equations. *Journal of Computational and Applied Mathematics*. 2025; 474: 116912. Available from: https://doi.org/10.1016/j.cam.2025.116912.

[2] Sher M, Shah K, Khan ZA. Study of time fractional order problems with proportional delay and controllability term via fixed point approach. *AIMS Mathematics*. 2021; 6(5): 5387–5396. Available from: https://doi.org/10.3934/math.2021317.

[3] Sher M, Khan A, Shah K, Abdeljawad T. Existence and stability theory of pantograph conformable fractional differential problem. *Thermal Science*. 2023; 27(Spec. issue 1): 237–244. Available from: https://doi.org/10.2298/TSCI23S1237S.

[4] Bhatti MM, Yousif MA, Mishra SR, Shahid A. Simultaneous influence of thermo-diffusion and diffusion-thermo on non-Newtonian hyperbolic tangent magnetised nanofluid with hall current through a nonlinear stretching surface. *Pramana*. 2019; 93: 88. Available from: https://doi.org/10.1007/s12043-019-1850-z.

[5] Coronel-Escamilla A, Gómez-Aguilar JF, Baleanu D, Escobar-Jiménez RF, Olivares-Peregrino VH, Abundez-Pliego A. Formulation of Euler-Lagrange and Hamilton equations involving fractional operators with regular kernel. *Advances in Difference Equations*. 2016; 2016(1): 283. Available from: https://doi.org/10.1186/s13662-016-1001-5.

[6] Srivastava HM, Mohammed PO, Baleanu D, Yousif MA, Ibrahim IS, Abdelwahed M. Positivity and uniqueness of solutions for Riemann-Liouville fractional problem of delta types. *Alexandria Engineering Journal*. 2025; 114: 173–178. Available from: https://doi.org/10.1016/j.aej.2024.11.072.

[7] Yousif MA, Baleanu D, Abdelwahed M, Azzo SM, Mohammed PO. Finite difference β-fractional approach for solving the time-fractional FitzHugh-Nagumo equation. *Alexandria Engineering Journal*. 2025; 125: 127–132. Available from: https://doi.org/10.1016/j.aej.2025.04.035.

[8] Baleanu D, Asad JH, Petras I. Numerical solution of the fractional Euler-Lagrange's equations of a thin elastica model. *Nonlinear Dynamics*. 2015; 81(1): 97–102. Available from: https://doi.org/10.1007/s11071-015-1975-7.

[9] Baleanu D, Jajarmi A, Defterli O, Wannan R, Sajjadi SS, Asad JH. Fractional investigation of time-dependent mass pendulum. *Journal of Low Frequency Noise, Vibration and Active Control*. 2024; 43(1): 196–207. Available from: https://doi.org/10.1177/14613484231187439.

[10] Tang B, He Y, Wei L, Zhang X. A generalized fractional sub-equation method for fractional differential equations with variable coefficients. *Physics Letters A*. 2012; 376(38–39): 2588–2590. Available from: https://doi.org/10.1016/j.physleta.2012.07.018.

[11] Bekir A, Aksoy E, Cevikel AC. Exact solutions of nonlinear time fractional partial differential equations by sub-equation method. *Mathematical Methods in the Applied Sciences*. 2015; 38(13): 2779–2784. Available from: https://doi.org/10.1002/mma.3260.

[12] Zhou TY, Tian B. Auto-Bäcklund transformations, Lax pair, bilinear forms and bright solitons for an extended (3 + 1)-dimensional nonlinear Schrödinger equation in an optical fiber. *Applied Mathematics Letters*. 2022; 133: 108280. Available from: https://doi.org/10.1016/j.aml.2022.108280.

[13] Ozkan EM. New exact solutions of some important nonlinear fractional partial differential equations with beta derivative. *Fractal and Fractional*. 2022; 6(3): 173. Available from: https://doi.org/10.3390/fractalfract6030173.

[14] Khater MM, Jhangeer A, Rezazadeh H, Akinyemi L, Akbar MA, Inc M. Propagation of new dynamics of longitudinal bud equation among a magneto-electro-elastic round rod. *Modern Physics Letters B*. 2021; 35(35): 2150381. Available from: https://doi.org/10.1142/S0217984921503814.

[15] Mirzazadeh M, Eslami M, Biswas A. Solitons and periodic solutions to a couple of fractional nonlinear evolution equations. *Pramana*. 2014; 82(3): 465–476. Available from: https://doi.org/10.1007/s12043-013-0679-0.

[16] Eslami M, Fathi Vajargah B, Mirzazadeh M, Biswas A. Application of first integral method to fractional partial differential equations. *Indian Journal of Physics*. 2014; 88(2): 177–184. Available from: https://doi.org/10.1007/s12648-013-0401-6.

[17] Hosseini K, Mirzazadeh M, Baleanu D, Raza N, Park C, Ahmadian A, et al. The generalized complex Ginzburg-Landau model and its dark and bright soliton solutions. *The European Physical Journal Plus*. 2021; 136(7): 1–12. Available from: https://doi.org/10.1140/epjp/s13360-021-01637-z.

[18] Hosseini K, Mirzazadeh M, Salahshour S, Baleanu D, Zafar A. Specific wave structures of a fifth-order nonlinear water wave equation. *Journal of Ocean Engineering and Science*. 2022; 7(5): 462–466. Available from: https://doi.org/10.1016/j.joes.2021.09.019.

[19] Kaplan M, Bekir A. A novel analytical method for time-fractional differential equations. *Optik*. 2016; 127(20): 8209–8214. Available from: https://doi.org/10.1016/j.ijleo.2016.05.152.

[20] Javeed S, Baleanu D, Nawaz S, Rezazadeh H. Soliton solutions of nonlinear Boussinesq models using the exponential function technique. *Physica Scripta*. 2021; 96(10): 105209. Available from: https://doi.org/10.1088/1402-4896/ac0e01.

[21] Khan K, Akbar MA, Koppelaar H. Study of coupled nonlinear partial differential equations for finding exact analytical solutions. *Royal Society Open Science*. 2015; 2(7): 140406. Available from: https://doi.org/10.1098/rsos.140406.

[22] Zafar A, Raheel M, Asif M, Hosseini K, Mirzazadeh M, Akinyemi L. Some novel integration techniques to explore the conformable M-fractional Schrödinger-Hirota equation. *Journal of Ocean Engineering and Science*. 2022; 7(4): 337–344. Available from: https://doi.org/10.1016/j.joes.2021.09.007.

[23] Nisar KS, Ali KK, Inc M, Mehanna MS, Rezazadeh H, Akinyemi L. New solutions for the generalized resonant nonlinear Schrödinger equation. *Results in Physics*. 2022; 33: 105153. Available from: https://doi.org/10.1016/j.rinp.2021.105153.

[24] Sooppy Nisar K, Inan IE, Yepez-Martinez H, Inc M. Some new type optical and the other soliton solutions of coupled nonlinear Hirota equation. *Results in Physics*. 2022; 35: 105388. Available from: https://doi.org/10.1016/j.rinp.2022.105388.

[25] Hu H, Li X. New interaction solutions of the similarity reduction for the integrable (2 + 1)-dimensional Boussinesq equation. *International Journal of Modern Physics B*. 2022; 36(01): 2250001. Available from: https://doi.org/10.1142/S0217979222500011.

[26] Raslan KR, Ali KK, Shallal MA. The modified extended tanh method with the Riccati equation for solving the space-time fractional EW and MEW equations. *Chaos, Solitons & Fractals*. 2017; 103: 404–409. Available from: https://doi.org/10.1016/j.chaos.2017.06.029.

[27] Ahmed KK, Bilal M, Iqbal J, Yousif MA, Baleanu D, Mohammed PO. An analytical algebraic method for solving nonlinear fractional differential equations with conformable fractional derivatives. *Contemporary Mathematics*. 2025; 6(5): 5925–5954. Available from: https://doi.org/10.37256/cm.6520257471.

[28] Kaplan M, Koparan M, Bekir A. Regarding on the exact solutions for the nonlinear fractional differential equations. *Open Physics*. 2016; 14(1): 478–482. Available from: https://doi.org/10.1515/phys-2016-0056.

[29] Rahman Z, Abdeljabbar A, Ali MZ. Novel precise solitary wave solutions of two time fractional nonlinear evolution models via the MSE scheme. *Fractal and Fractional*. 2022; 6(8): 444. Available from: https://doi.org/10.3390/fractalfract6080444.

[30] Kumar D, Hosseini K, Kaabar MK, Kaplan M, Salahshour S. On some novel solution solutions to the generalized Schrödinger-Boussinesq equations for the interaction between complex short wave and real long wave envelope. *Journal of Ocean Engineering and Science*. 2022; 7(4): 353–362. Available from: https://doi.org/10.1016/j.joes.2021.09.008.

[31] Gu Y, Yuan W, Aminakbari N, Lin J. Meromorphic solutions of some algebraic differential equations related Painlevé equation IV and its applications. *Mathematical Methods in the Applied Sciences*. 2018; 41(10): 3832–3840. Available from: https://doi.org/10.1002/mma.4869.

[32] Gu Y, Wu C, Yao X, Yuan W. Characterizations of all real solutions for the KdV equation and WR. *Applied Mathematics Letters*. 2020; 107: 106446. Available from: https://doi.org/10.1016/j.aml.2020.106446.

[33] Gu Y, Liao L. Closed form solutions of Gerdjikov-Ivanov equation in nonlinear fiber optics involving the beta derivatives. *International Journal of Modern Physics B*. 2022; 36(19): 2250116. Available from: https://doi.org/10.1142/S0217979222501168.

[34] Hirota R, Satsuma J. Soliton solutions of a coupled Korteweg-de Vries equation. *Physics Letters A*. 1981; 85(8–9): 407–408. Available from: https://doi.org/10.1016/0375-9601(81)90423-0.

[35] Gu Y, Jiang C, Lai Y. Analytical solutions of the fractional Hirota-Satsuma coupled KdV equation along with analysis of bifurcation, sensitivity and chaotic behaviors. *Fractal and Fractional*. 2024; 8(10): 585. Available from: https://doi.org/10.3390/fractalfract8100585.

[36] Yin Q, Gao B. New solutions of the time-fractional Hirota-Satsuma coupled KdV equation by three distinct methods. *International Journal of Geometric Methods in Modern Physics*. 2023; 20(10): 2350170. Available from: https://doi.org/10.1142/S0219887823501700.

[37] Kurt A, Rezazadeh H, Senol M, Neirameh A, Tasbozan O, Eslami M, et al. Two effective approaches for solving fractional generalized Hirota-Satsuma coupled KdV system arising in interaction of long waves. *Journal of Ocean Engineering and Science*. 2019; 4(1): 24–32. Available from: https://doi.org/10.1016/j.joes.2018.12.004.

[38] Yan Z. The extended Jacobian elliptic function expansion method and its application in the generalized Hirota-Satsuma coupled KdV system. *Chaos, Solitons & Fractals*. 2003; 15(3): 575–583. Available from: https://doi.org/10.1016/S0960-0779(02)00145-5.

[39] Kaplan M, Bekir A. Construction of exact solutions to the space-time fractional differential equations via new approach. *Optik*. 2017; 132: 1–8. Available from: https://doi.org/10.1016/j.ijleo.2016.11.139.

[40] Bilal M, Iqbal J, Ali R, Awwad FA, Ismail EA. Exploring families of solitary wave solutions for the fractional coupled Higgs system using modified extended direct algebraic method. *Fractal and Fractional*. 2023; 7(9): 653. Available from: https://doi.org/10.3390/fractalfract7090653.